

xpipe

5 YEARS
WARRANTY



EN

Series of adjustable projectors, semi-recessed or surface mounting, equipped with COB LEDs. Body of extruded aluminum profile, electrostatically painted.

Plate and recessed system of aluminum profiled board, electrostatically painted.

Decorative ring of die-casting aluminum.

The light fitting is equipped with an optical system with FRESNEL lens of polycarbonate, UGR<19.

Constant current driver delivered with the luminaire.

Range of applications

Decorative interior lighting.

RO

Serie de proiectoare orientabile, cu montaj semi încastrat sau aparent, echipate cu LED-uri COB. Corpul din profil de aluminiu extrudat, vopsit în câmp electrostatic.

Placă și sistem de încastrare din tablă profilată de aluminiu, vopsite în câmp electrostatic.

Inel decorativ din aluminiu turnat.

Corpul de iluminat este prevăzut cu un sistem optic cu lentilă FRESNEL din policarbonat, UGR<19.

Alimentator în curent constant livrat împreună cu corpul de iluminat.

Aplicații

Iluminatul decorativ de interior.

IT

Serie di proiettori orientabili, con montaggio semi incasso o da soffitto, equipaggiati da LED COB.

Corpo in profilo di alluminio estruso, verniciato a polveri.

Piastra e sistema da incasso in lamiera profilata di alluminio, verniciati a polveri.

Anello decorativo in pressofusione di alluminio.

L'apparecchio viene consegnato completo di sistema ottico con lente FRESNEL in policarbonato, UGR<19.

Alimentatore a corrente costante fornito con l'apparecchi

Campi di applicazione

Illuminazione decorativa per interni.





xpipe

PE01 RECESSED



FINISHING AVAILABLE



MWH MBK SGD

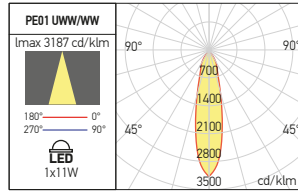

PE02 RECESSED

FINISHING AVAILABLE

MWH MBK SGD

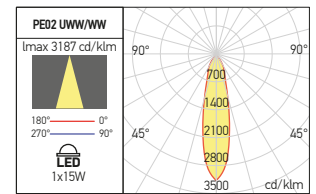



Code	Finishing	LED type	Power	Input voltage	Output current /voltage driver	Driver	LED lux	System flux	CCT	CRI	Optics	Ø	Weight
PE01UWW MWH	MWH	COB CITIZEN	1x11W	220-240V AC	500 mA / 12-24V DC	Included	1170 lm	672 lm	2700K	80	24°	Ø45 mm	0,24 kg
PE01UWW MBK	MBK	COB CITIZEN	1x11W	220-240V AC	500 mA / 12-24V DC	Included	1170 lm	672 lm	2700K	80	24°	Ø45 mm	0,24 kg
● PE01UWW SGD	SGD	COB CITIZEN	1x11W	220-240V AC	500 mA / 12-24V DC	Included	1170 lm	672 lm	2700K	80	24°	Ø45 mm	0,24 kg
PE01WW MWH	MWH	COB CITIZEN	1x11W	220-240V AC	500 mA / 12-24V DC	Included	1210 lm	691 lm	3000K	80	24°	Ø45 mm	0,24 kg
PE01WW MBK	MBK	COB CITIZEN	1x11W	220-240V AC	500 mA / 12-24V DC	Included	1210 lm	691 lm	3000K	80	24°	Ø45 mm	0,24 kg
PE01WW SGD	SGD	COB CITIZEN	1x11W	220-240V AC	500 mA / 12-24V DC	Included	1210 lm	691 lm	3000K	80	24°	Ø45 mm	0,24 kg
PE02UWW MWH	MWH	COB CITIZEN	1x15W	220-240V AC	350 mA / 27-42V DC	Included	1640 lm	942 lm	2700K	80	24°	Ø55 mm	0,30 kg
PE02UWW MBK	MBK	COB CITIZEN	1x15W	220-240V AC	350 mA / 27-42V DC	Included	1640 lm	942 lm	2700K	80	24°	Ø55 mm	0,30 kg
● PE02UWW SGD	SGD	COB CITIZEN	1x15W	220-240V AC	350 mA / 27-42V DC	Included	1640 lm	942 lm	2700K	80	24°	Ø55 mm	0,30 kg
PE02WW MWH	MWH	COB CITIZEN	1x15W	220-240V AC	350 mA / 27-42V DC	Included	1690 lm	970 lm	3000K	80	24°	Ø55 mm	0,30 kg
PE02WW MBK	MBK	COB CITIZEN	1x15W	220-240V AC	350 mA / 27-42V DC	Included	1690 lm	970 lm	3000K	80	24°	Ø55 mm	0,30 kg
PE02WW SGD	SGD	COB CITIZEN	1x15W	220-240V AC	350 mA / 27-42V DC	Included	1690 lm	970 lm	3000K	80	24°	Ø55 mm	0,30 kg

● ORDERED UPON REQUEST / DISPONIBIL DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE

PE03 CEILING

FINISHING AVAILABLE



MWH MBK SGD

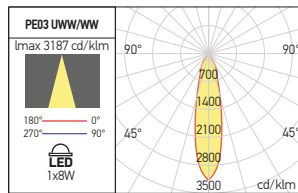

PE04 CEILING

FINISHING AVAILABLE

MWH MBK SGD

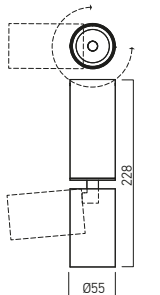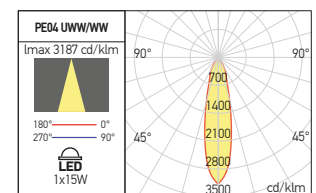



Code	Finishing	LED type	Power	Input voltage	Output current /voltage driver	Driver	LED lux	System flux	CCT	CRI	Optics	Weight
PE03UWW MWH	MWH	COB CITIZEN	1x8W	220-240V AC	500 mA / 12-21V DC	Included	860 lm	491 lm	2700K	80	24°	0,28 kg
PE03UWW MBK	MBK	COB CITIZEN	1x8W	220-240V AC	500 mA / 12-21V DC	Included	860 lm	491 lm	2700K	80	24°	0,28 kg
● PE03UWW SGD	SGD	COB CITIZEN	1x8W	220-240V AC	500 mA / 12-21V DC	Included	860 lm	491 lm	2700K	80	24°	0,28 kg
PE03WW MWH	MWH	COB CITIZEN	1x8W	220-240V AC	500 mA / 12-21V DC	Included	890 lm	502 lm	3000K	80	24°	0,28 kg
PE03WW MBK	MBK	COB CITIZEN	1x8W	220-240V AC	500 mA / 12-21V DC	Included	890 lm	502 lm	3000K	80	24°	0,28 kg
PE03WW SGD	SGD	COB CITIZEN	1x8W	220-240V AC	500 mA / 12-21V DC	Included	890 lm	502 lm	3000K	80	24°	0,28 kg
PE04UWW MWH	MWH	COB CITIZEN	1x15W	220-240V AC	350 mA / 30-42V DC	Included	1640 lm	942 lm	2700K	80	24°	0,36 kg
PE04UWW MBK	MBK	COB CITIZEN	1x15W	220-240V AC	350 mA / 30-42V DC	Included	1640 lm	942 lm	2700K	80	24°	0,36 kg
● PE04UWW SGD	SGD	COB CITIZEN	1x15W	220-240V AC	350 mA / 30-42V DC	Included	1640 lm	942 lm	2700K	80	24°	0,36 kg
PE04WW MWH	MWH	COB CITIZEN	1x15W	220-240V AC	350 mA / 30-42V DC	Included	1690 lm	970 lm	3000K	80	24°	0,36 kg
PE04WW MBK	MBK	COB CITIZEN	1x15W	220-240V AC	350 mA / 30-42V DC	Included	1690 lm	970 lm	3000K	80	24°	0,36 kg
PE04WW SGD	SGD	COB CITIZEN	1x15W	220-240V AC	350 mA / 30-42V DC	Included	1690 lm	970 lm	3000K	80	24°	0,36 kg

● ORDERED UPON REQUEST / DISPONIBIL DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE

PE05 CEILING

FINISHING AVAILABLE

MWH MBK **SGD**

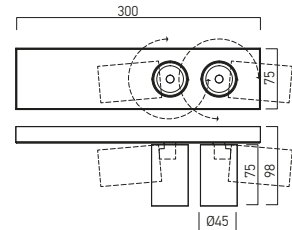



Code	Finishing	LED type	Power	Input voltage	Output current / voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PE05UWW MWH	MWH	COB CITIZEN	2x11W	200-240V AC	500 mA / 27-42V DC	Included	2 x 1170 lm	2 x 672 lm	2700K	80	24°	1,05 kg
PE05UWW MBK	MBK	COB CITIZEN	2x11W	200-240V AC	500 mA / 27-42V DC	Included	2 x 1170 lm	2 x 672 lm	2700K	80	24°	1,05 kg
● PE05UWW SGD	SGD	COB CITIZEN	2x11W	200-240V AC	500 mA / 27-42V DC	Included	2 x 1170 lm	2 x 672 lm	2700K	80	24°	1,05 kg
PE05WW MWH	MWH	COB CITIZEN	2x11W	200-240V AC	500 mA / 27-42V DC	Included	2 x 1210 lm	2 x 691 lm	3000K	80	24°	1,05 kg
PE05WW MBK	MBK	COB CITIZEN	2x11W	200-240V AC	500 mA / 27-42V DC	Included	2 x 1210 lm	2 x 691 lm	3000K	80	24°	1,05 kg
PE05WW SGD	SGD	COB CITIZEN	2x11W	200-240V AC	500 mA / 27-42V DC	Included	2 x 1210 lm	2 x 691 lm	3000K	80	24°	1,05 kg

● ORDERED UPON REQUEST / DISPONIBIL DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE

PE06 CEILING

FINISHING AVAILABLE

MWH MBK **SGD**

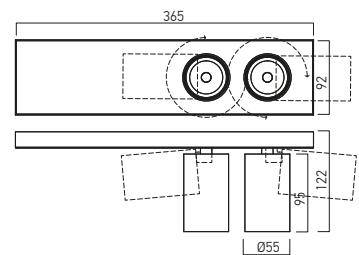

Code	Finishing	LED type	Power	Input voltage	Output current / voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
PE06UWW MWH	MWH	COB CITIZEN	2x15W	200-240V AC	700 mA / 27-42V DC	Included	2 x 1640 lm	2 x 942 lm	2700K	80	24°	1,52 kg
PE06UWW MBK	MBK	COB CITIZEN	2x15W	200-240V AC	700 mA / 27-42V DC	Included	2 x 1640 lm	2 x 942 lm	2700K	80	24°	1,52 kg
● PE06UWW SGD	SGD	COB CITIZEN	2x15W	200-240V AC	700 mA / 27-42V DC	Included	2 x 1640 lm	2 x 942 lm	2700K	80	24°	1,52 kg
PE06WW MWH	MWH	COB CITIZEN	2x15W	200-240V AC	700 mA / 27-42V DC	Included	2 x 1690 lm	2 x 970 lm	3000K	80	24°	1,52 kg
PE06WW MBK	MBK	COB CITIZEN	2x15W	200-240V AC	700 mA / 27-42V DC	Included	2 x 1690 lm	2 x 970 lm	3000K	80	24°	1,52 kg
PE06WW SGD	SGD	COB CITIZEN	2x15W	200-240V AC	700 mA / 27-42V DC	Included	2 x 1690 lm	2 x 970 lm	3000K	80	24°	1,52 kg

● ORDERED UPON REQUEST / DISPONIBIL DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE