


Led Panel new

Source	LED SMD	UGR	<19
Power	38,5W	LED life	25.000 h
Driver included	On/Off	Insulation class	II
Drivers available	1-10V / DALI / Push	IP	20
MacAdam	SDCM ≤4	Material	Aluminum
CCT	3000 K / 4000 K	Warranty	5 years
CRI	≥80 / ≥90		

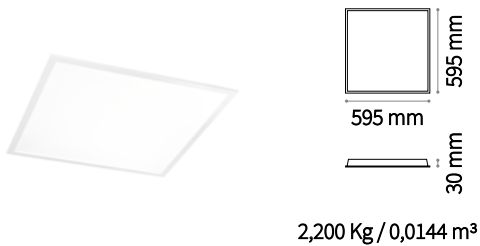

2,200 Kg / 0,0144 m³

LED SMD Driver ON/OFF included

CRI ≥80

Power	Beam	Flux	CCT	Finish	Code	€
38,5 W	81°	3800 Lm	3000 K	White	249711	45 new
		3950 Lm	4000 K	White	249728	45 new

CRI ≥90

Power	Beam	Flux	CCT	Finish	Code	€
38,5 W	81°	3800 Lm	3000 K	White	246390	45 new
		3950 Lm	4000 K	White	244181	45 new

DIMMABLE DRIVER Not included/Optional


	Power	Range	Output	Measure	Code	€
1-10V	40 W	850-1050 mA	1000 mA	125x83x26 mm	247854	30 new
DALI/Push	40 W	550-1050 mA	1000 mA	106x69x28 mm	247847	55 new

MOUNTING KIT Not included/Optional



	Ceiling cup	N° Cables	Cables Length	Color	Code	€
Kit Pendant	No	4	1000 mm	Grey	244198	4 new

	Finish	Code	€
Kit Surface	Grey	244204	3 new



m	lx	øm
1	1470	1,79
2	367	3,59
3	163	5,38
4	92	7,18
5	59	8,97

CRI≥80 38,5W 81° 3800 Lm 3000 K