

Kanlux

TONIL II LED

Oprawa ścienna LED




[V] 220-240 AC	[Hz] 50	[lm] 145	[°] 30	[h] ≥15000	[h] 20000	Tc [K] 3000
Ellipse ≤ 6x MacAdam	Ra 80	SMD	[°]	[°]	IP 20	
[°C] 5+25	[°]	[°] 360	[°] 360	[°]	[mm²] 0,5-1,5	[m] 0,2m
	lm W 44					

TONIL II LED B



TONIL II LED B	32522	3,3	czarny
TONIL II LED W	32523	3,3	biały

- Materiał obudowy: stop aluminium
- Materiał klosza: tworzywo sztuczne

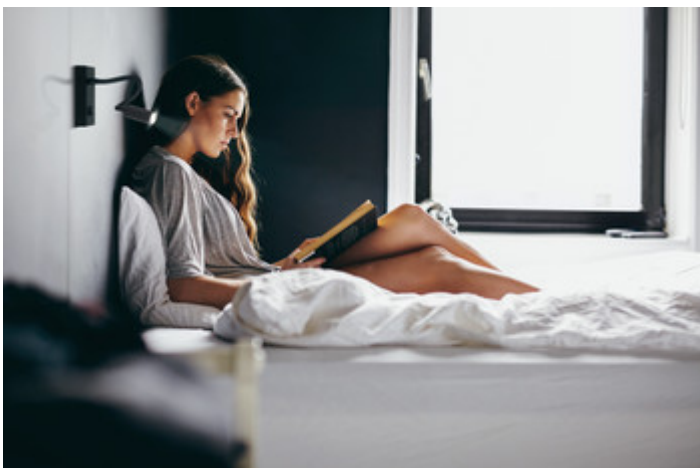


TONIL II LED


Oprawa ścienna LED



TONIL II LED B



TONIL II LED W



TONIL II LED