


# Outdoor Facade Indirect RD



	EAN	Ø x H	W	lm	lm/W	K	IP	IK
Outdoor Facade IND RD 13W/3000K GY IP54	4058075075016	150x118	13	500	35	3000K	54	06
Outdoor Facade IND RD 13W/3000K WT IP54	4058075075030	150x118	13	650	50	3000K	54	06

	EAN	☹	°C	PF	R <sub>a</sub>	V <sub>AC</sub>	Hz	👤
Outdoor Facade IND RD 13W/3000K GY IP54	4058075075016	240°	-20...40	≥ 0.5	> 80	220-240V	50/60Hz	0.8 kg
Outdoor Facade IND RD 13W/3000K WT IP54	4058075075030	240°	-20...40	≥ 0.5	> 80	220-240V	50/60Hz	0.8 kg

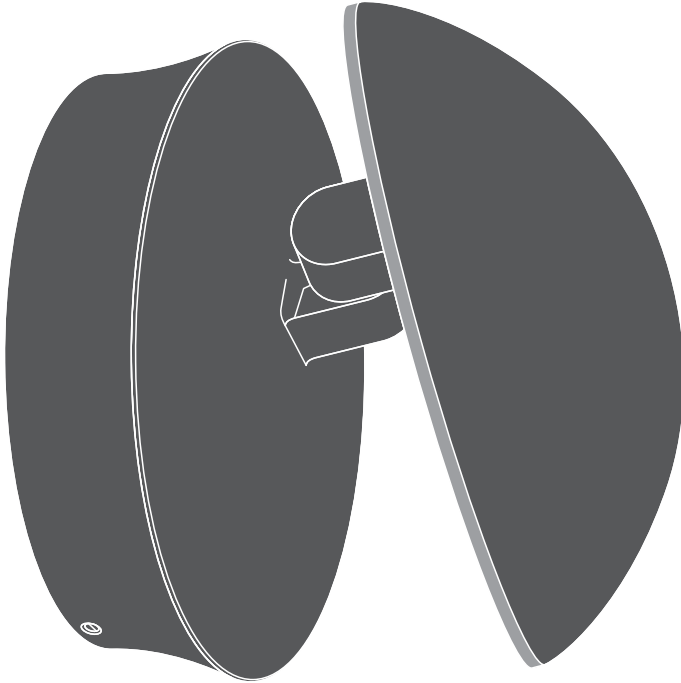









IP54

SMD  
LED








**LEDVANCE**

Outdoor Facade Belt SQ/RD

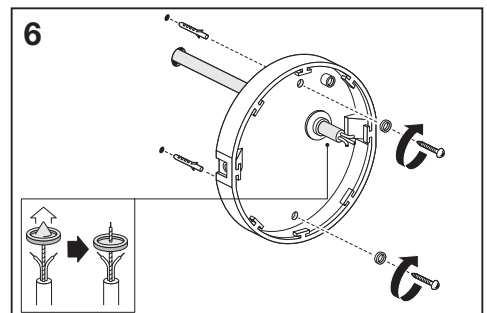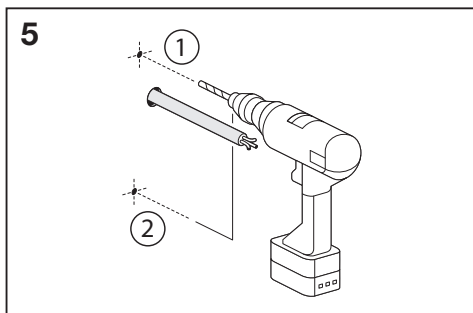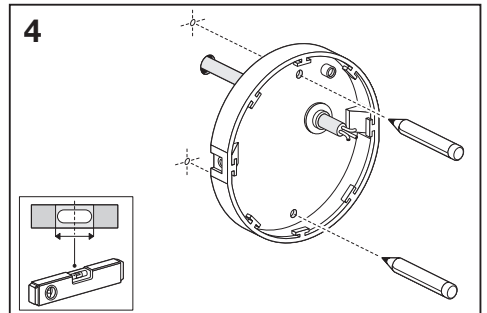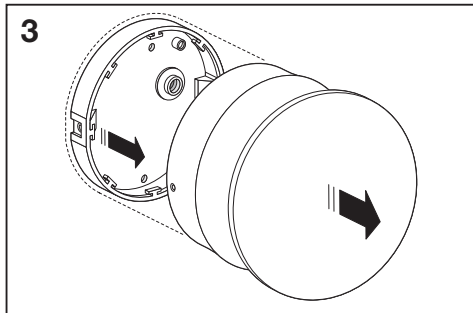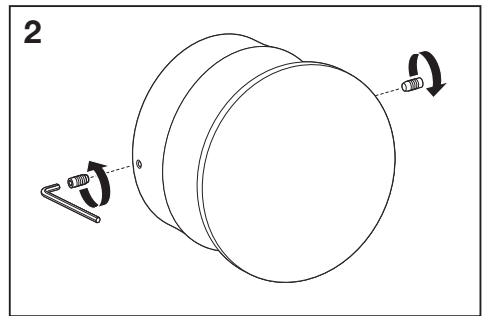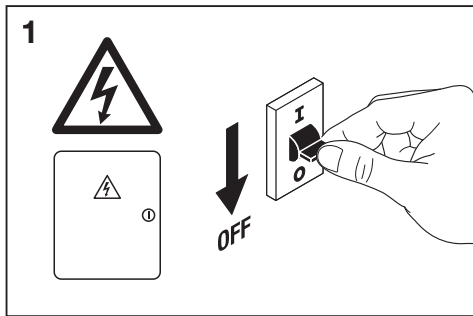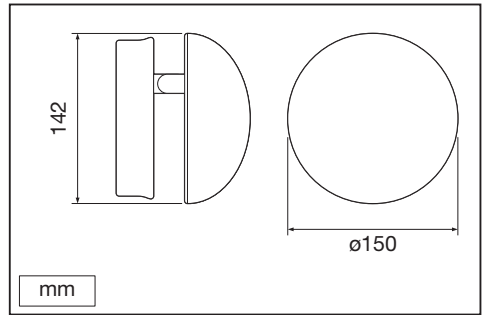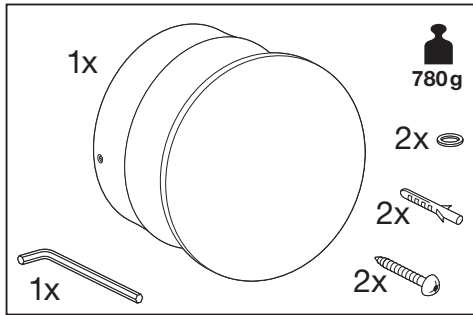

Outdoor Facade Belt SQ/RD

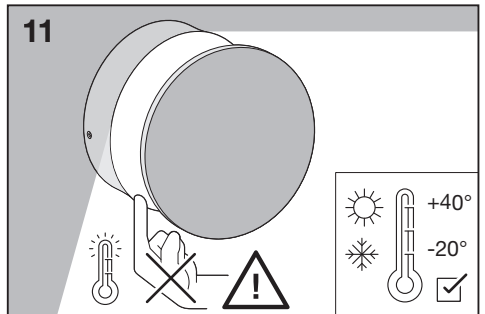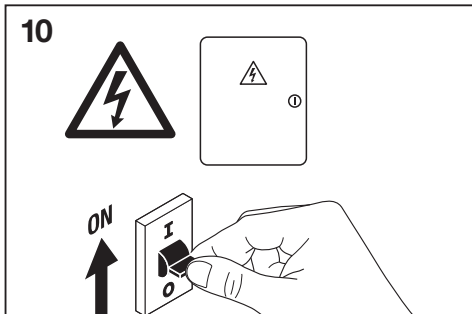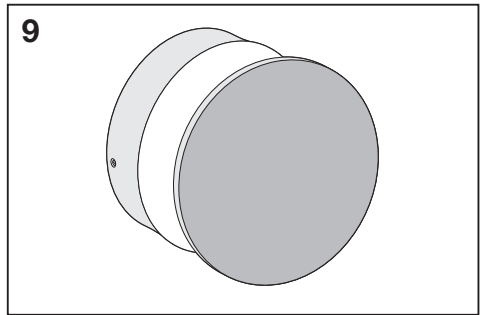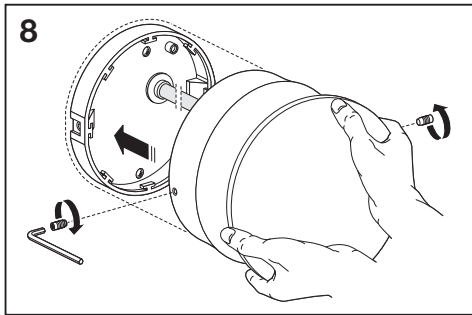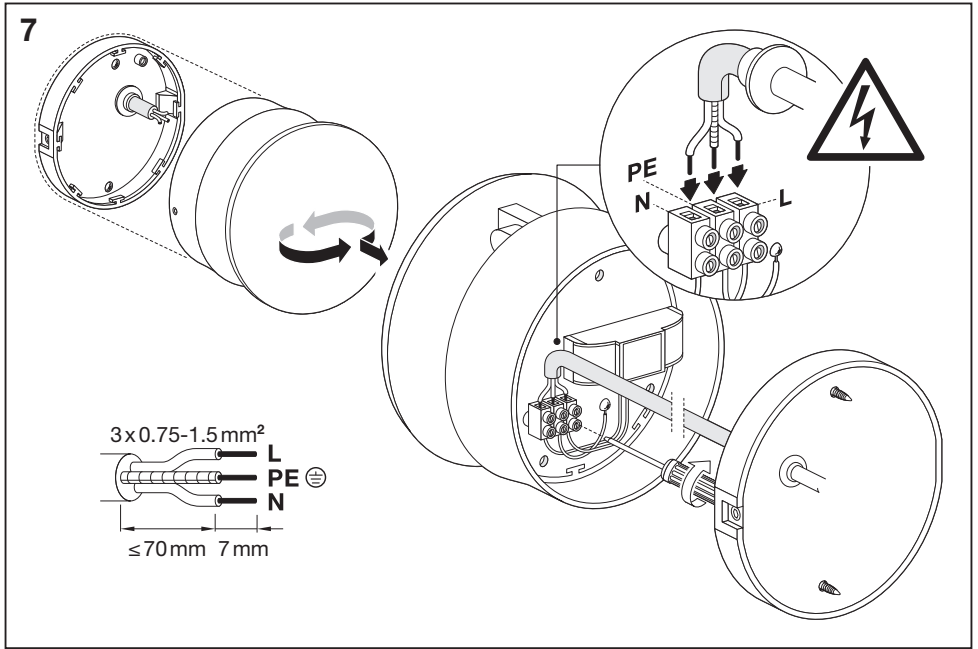

[www.luminaires.ledvance.com](http://www.luminaires.ledvance.com)



Downlight



Spot



Linear



Panel



Surface



DampProof  
IP65



HighBay



Floodlight



C10449057  
G11027763  
25.10.17

LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg  
Germany  
[www.ledvance.com](http://www.ledvance.com)