




Outdoor Facade Updown

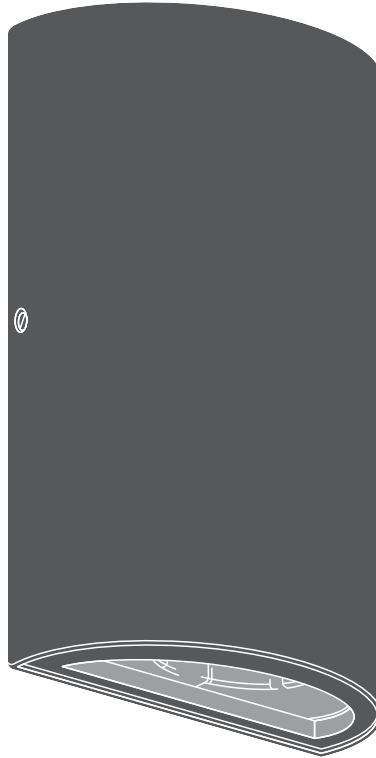

	EAN	L x W x H	W	lm	lm/W	K	IP	IK
Outdoor Facade Updown 12W/3000K GY IP54	4058075075054	55x90x160	12	700	60	3000K	54	06
Outdoor Facade Updown 12W/3000K WT IP54	4058075075078	55x90x160	12	700	60	3000K	54	06

	EAN		 (°C)	PF	R _a	V _{AC}	Hz	
Outdoor Facade Updown 12W/3000K GY IP54	4058075075054	280°	-20...40	≥ 0.5	> 80	220-240V	50/60 Hz	0.5 kg
Outdoor Facade Updown 12W/3000K WT IP54	4058075075078	280°	-20...40	≥ 0.5	> 80	220-240V	50/60 Hz	0.5 kg









IP54

SMD
LED








LEDVANCE

Outdoor Facade Updown

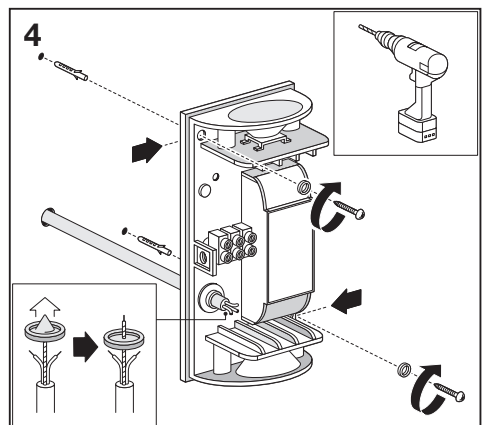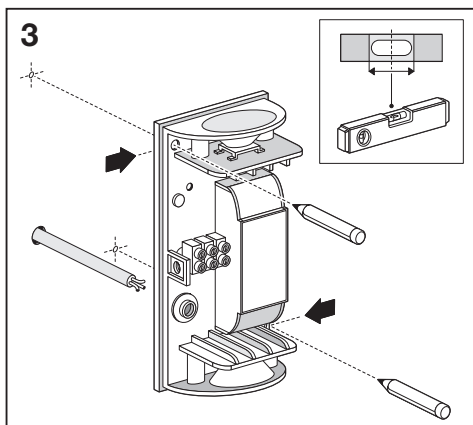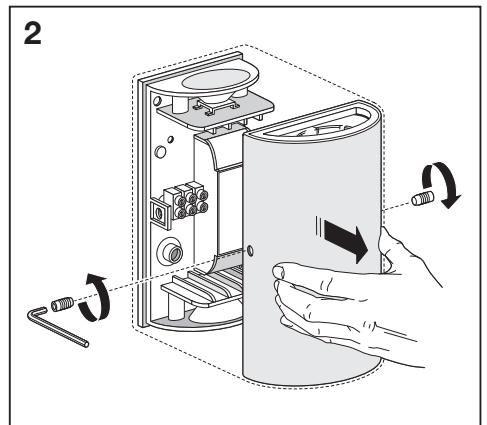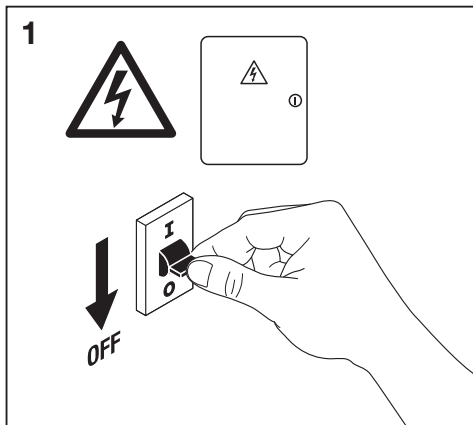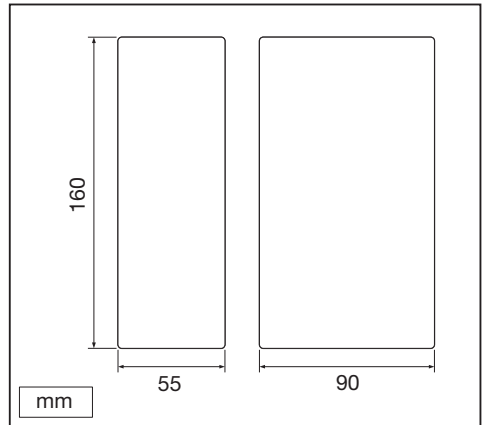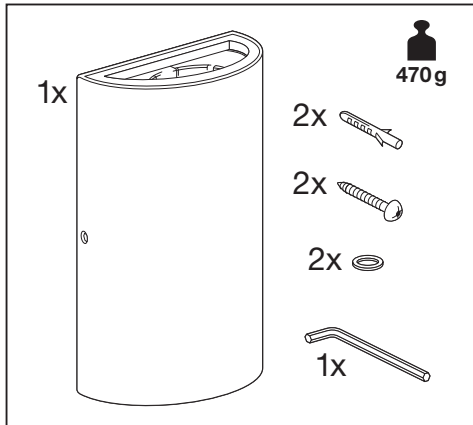

Outdoor Facade Updown

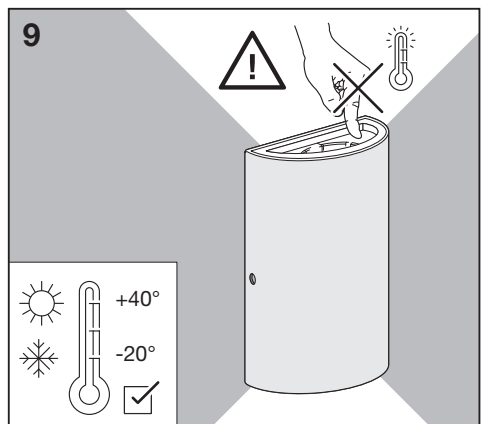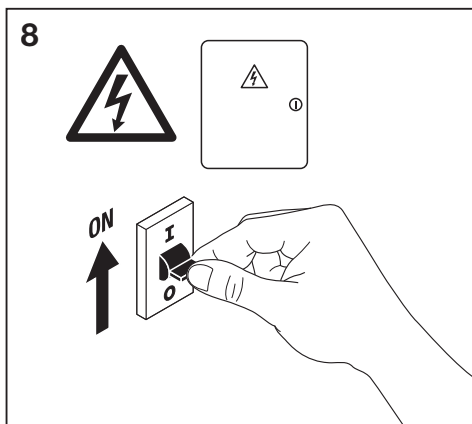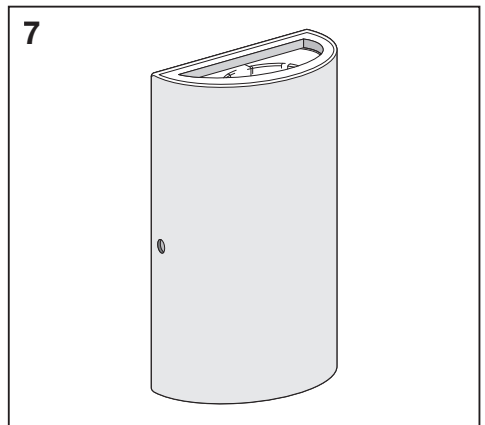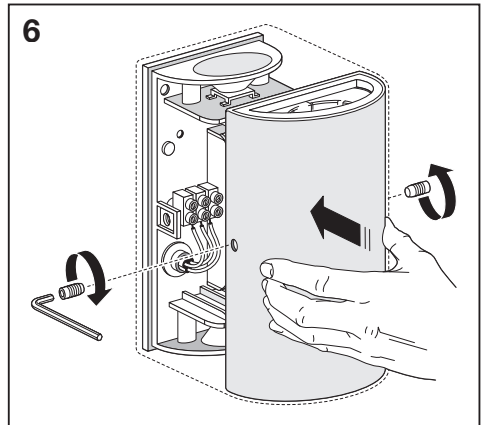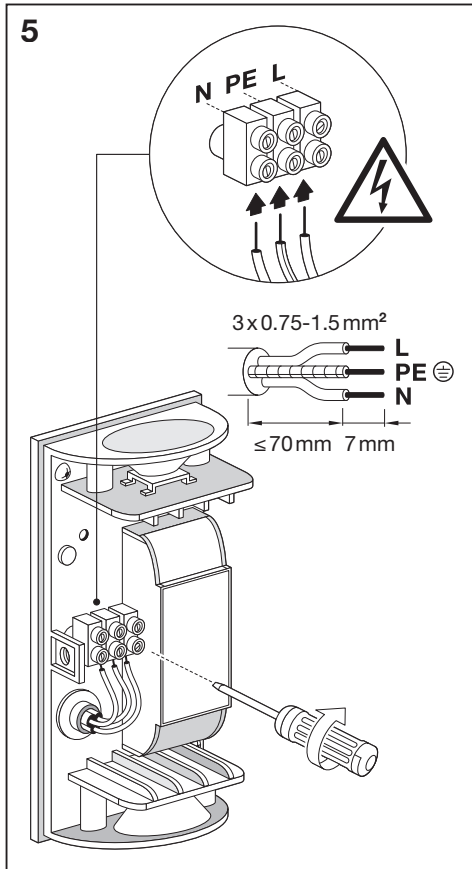

www.luminaires.ledvance.com



Downlight



Spot



Linear



Panel



Surface



DampProof
IP65



HighBay



Floodlight



C10449057
G11027764
25.10.17

LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg
Germany
www.ledvance.com