




SURFACE BULKHEAD SENSOR








SURFACE BULKHEAD SENSOR EMERGENCY

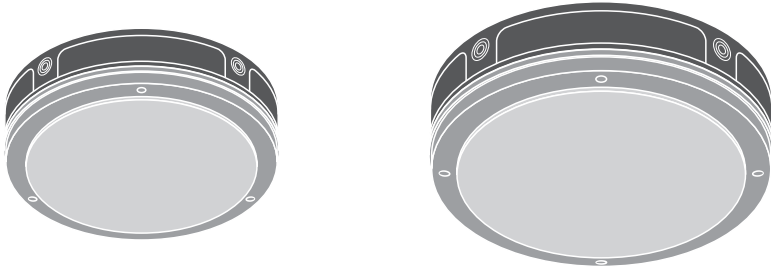





	EAN	Ø x h [mm]	W	W _R	V _{AC}	Hz	lm	lm/W	K
SF BLKH 250 10W/3000K S WT IP65	4058075374928	258x70	10	9	220-240V	50/60Hz	800	80	3000
SF BLKH 250 10W/4000K S WT IP65	4058075374942	258x70	10	9	220-240V	50/60Hz	800	80	4000
SF BLKH 250 10W/3000K S BK IP65	4058075374966	258x70	10	9	220-240V	50/60Hz	800	80	3000
SF BLKH 250 10W/4000K S BK IP65	4058075374980	258x70	10	9	220-240V	50/60Hz	800	80	4000
SF BLKH 250 10W/3000K S WT IP65 EM	4058075375086	258x70	10	12	220-240V	50/60Hz	800	80	3000
SF BLKH 250 10W/4000K S WT IP65 EM	4058075375109	258x70	10	12	220-240V	50/60Hz	800	80	4000
SF BLKH 250 10W/3000K S BK IP65 EM	4058075375123	258x70	10	12	220-240V	50/60Hz	800	80	3000
SF BLKH 250 10W/4000K S BK IP65 EM	4058075375147	258x70	10	12	220-240V	50/60Hz	800	80	4000
SF BLKH 300 15W/3000K S WT IP65	4058075375246	308x70	15	14	220-240V	50/60Hz	1400	95	3000
SF BLKH 300 15W/4000K S WT IP65	4058075375260	308x70	15	14	220-240V	50/60Hz	1400	95	4000
SF BLKH 300 15W/3000K S BK IP65	4058075375284	308x70	15	14	220-240V	50/60Hz	1400	95	3000
SF BLKH 300 15W/4000K S BK IP65	4058075375307	308x70	15	14	220-240V	50/60Hz	1400	95	4000
SF BLKH 300 15W/3000K S WT IP65 EM	4058075375406	308x70	15	17	220-240V	50/60Hz	1400	95	3000
SF BLKH 300 15W/4000K S WT IP65 EM	4058075375420	308x70	15	17	220-240V	50/60Hz	1400	95	4000
SF BLKH 300 15W/3000K S BK IP65 EM	4058075375444	308x70	15	17	220-240V	50/60Hz	1400	95	3000
SF BLKH 300 15W/4000K S BK IP65 EM	4058075375468	308x70	15	17	220-240V	50/60Hz	1400	95	4000




	EAN	IP	IK	∠	R _a	°(°C)	PF	👤
SF BLKH 250 10W/3000K S WT IP65	4058075374928	65	10	120°	> 80	-20...+40	≥ 0.5	0.6 kg
SF BLKH 250 10W/4000K S WT IP65	4058075374942	65	10	120°	> 80	-20...+40	≥ 0.5	0.6 kg
SF BLKH 250 10W/3000K S BK IP65	4058075374966	65	10	120°	> 80	-20...+40	≥ 0.5	0.6 kg
SF BLKH 250 10W/4000K S BK IP65	4058075374980	65	10	120°	> 80	-20...+40	≥ 0.5	0.6 kg
SF BLKH 250 10W/3000K S WT IP65 EM	4058075375086	65	10	120°	> 80	+5...+40	≥ 0.5	0.8 kg
SF BLKH 250 10W/4000K S WT IP65 EM	4058075375109	65	10	120°	> 80	+5...+40	≥ 0.5	0.8 kg
SF BLKH 250 10W/3000K S BK IP65 EM	4058075375123	65	10	120°	> 80	+5...+40	≥ 0.5	0.8 kg
SF BLKH 250 10W/4000K S BK IP65 EM	4058075375147	65	10	120°	> 80	+5...+40	≥ 0.5	0.8 kg
SF BLKH 300 15W/3000K S WT IP65	4058075375246	65	10	120°	> 80	-20...+40	≥ 0.5	0.7 kg
SF BLKH 300 15W/4000K S WT IP65	4058075375260	65	10	120°	> 80	-20...+40	≥ 0.5	0.7 kg
SF BLKH 300 15W/3000K S BK IP65	4058075375284	65	10	120°	> 80	-20...+40	≥ 0.5	0.7 kg
SF BLKH 300 15W/4000K S BK IP65	4058075375307	65	10	120°	> 80	-20...+40	≥ 0.5	0.7 kg
SF BLKH 300 15W/3000K S WT IP65 EM	4058075375406	65	10	120°	> 80	+5...+40	≥ 0.5	1.0 kg
SF BLKH 300 15W/4000K S WT IP65 EM	4058075375420	65	10	120°	> 80	+5...+40	≥ 0.5	1.0 kg
SF BLKH 300 15W/3000K S BK IP65 EM	4058075375444	65	10	120°	> 80	+5...+40	≥ 0.5	1.0 kg
SF BLKH 300 15W/4000K S BK IP65 EM	4058075375468	65	10	120°	> 80	+5...+40	≥ 0.5	1.0 kg


SURFACE BULKHEAD / SURFACE BULKHEAD SENSOR

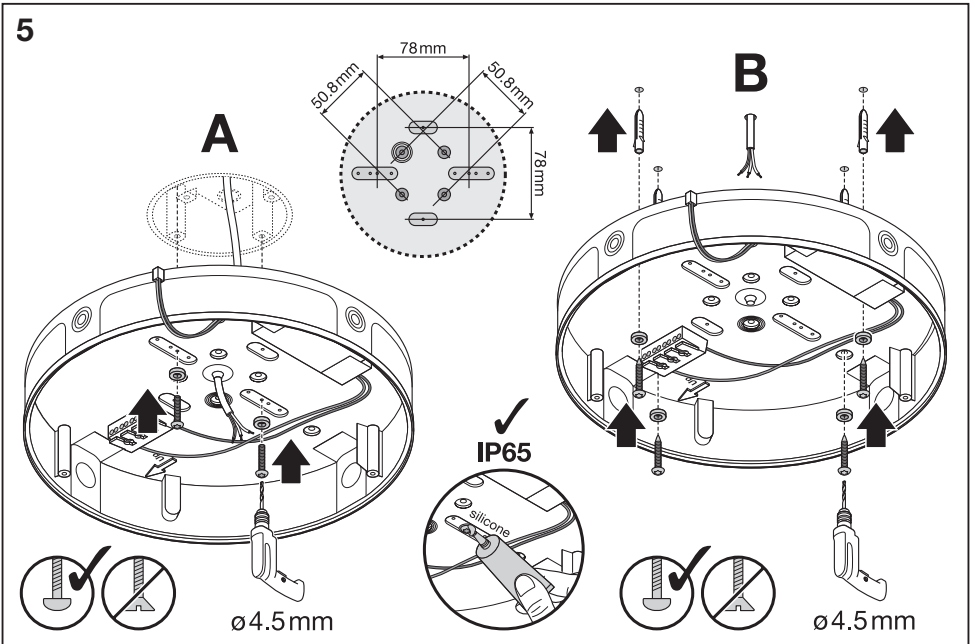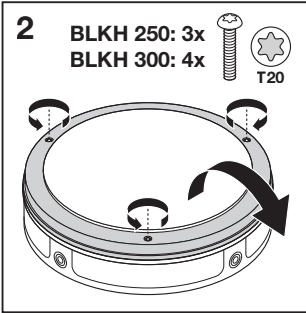

SURFACE BULKHEAD / SURFACE BULKHEAD SENSOR

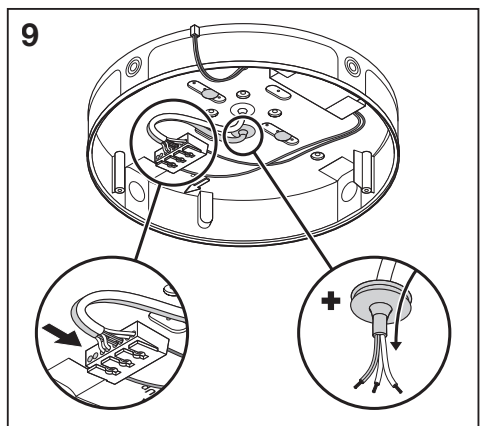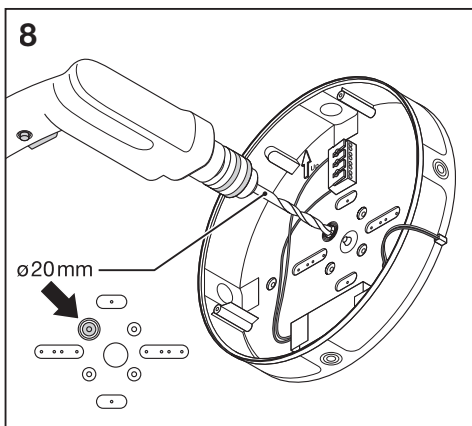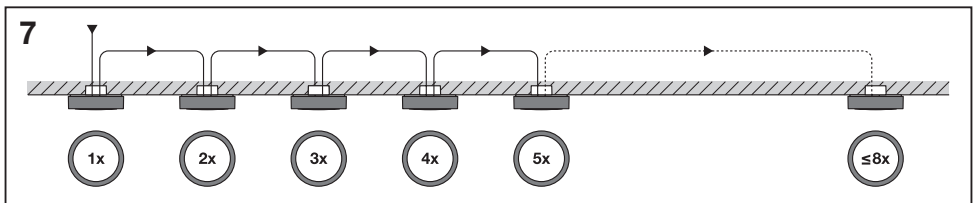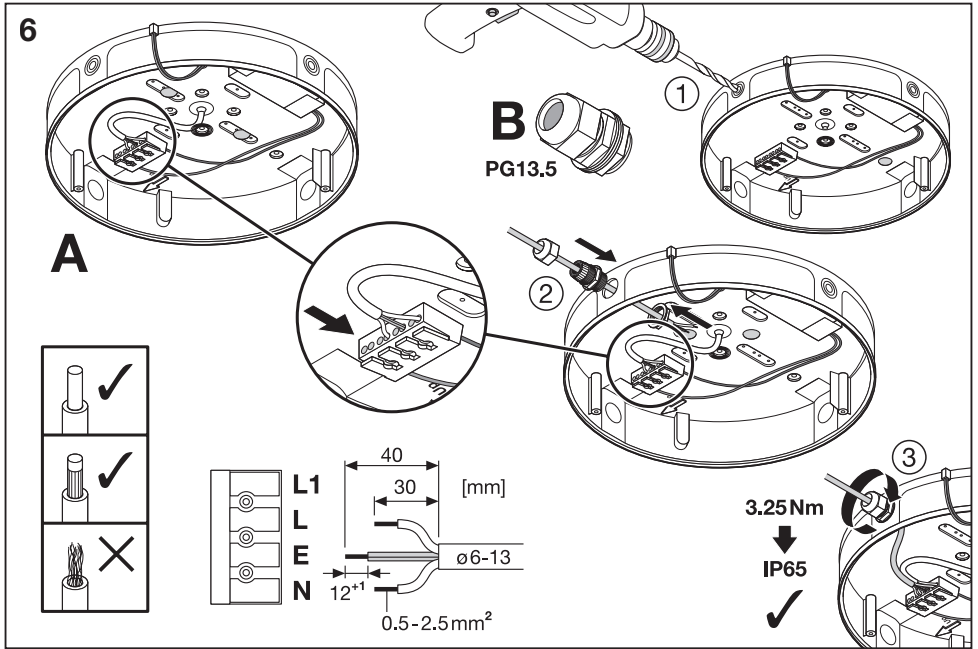

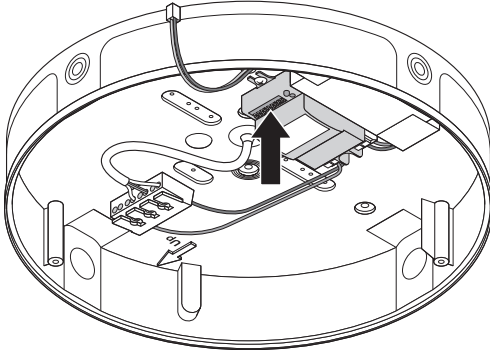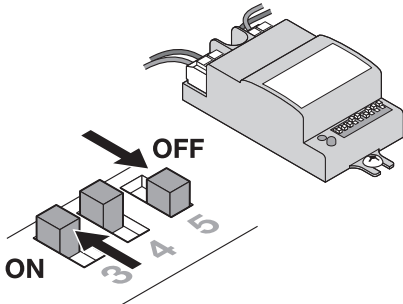



Detection Area

1	2	3	
ON	ON	ON	100 %
-	ON	ON	75 %
ON	-	ON	50 %
-	-	ON	25 %
-	-	-	10 %



Hold Time

4	5	6	
ON	ON	ON	5 s
-	ON	ON	30 s
ON	-	ON	90 s
-	-	ON	3 min
ON	ON	-	20 min
-	-	-	30 min



Daylight Sensor

7	8	9	
ON	ON	ON	2 LUX
ON	ON	-	10 LUX
-	ON	-	25 LUX
ON	-	-	50 LUX
-	-	-	Disable

Detection Area

