

**Niloé™ Step  
Cover plates**
**Cat. No(s): 8 630 91/92/93/94/95 - 8 631 91/92/93/94/95 - 8 632 91/92/93/94/95  
 8 633 91/92/93/94/95 - 8 634 91/92/93/94/95 - 8 635 91/92/93/94/95  
 8 636 91/92/93/94/95 - 8 637 91/92/93/94/95 - 8 638 91/92/93/94/95  
 8 639 91/92/93/94/95**


8 63X 91



8 63X 92

**1. USE**


 Faceplates for Niloé Step from 1 to 5 gangs wiring accessories.  
 Available in several colours.

**2. RANGE**
**1-gang plates**

|   |                     |          |
|---|---------------------|----------|
|  | Atoll               | 8 630 91 |
|   | White               | 8 631 91 |
|   | Old pink            | 8 632 91 |
|   | Aluminium           | 8 633 91 |
|   | Medium grey         | 8 634 91 |
|   | Black               | 8 635 91 |
|   | Pearl               | 8 636 91 |
|   | Dark grey           | 8 637 91 |
|   | Brushed aluminium   | 8 638 91 |
|   | Brushed medium grey | 8 649 91 |


**2-gang plates**

71 mm spacing - horizontal and vertical

|   |                     |          |
|---|---------------------|----------|
|  | Atoll               | 8 630 92 |
|   | White               | 8 631 92 |
|   | Old pink            | 8 632 92 |
|   | Aluminium           | 8 633 92 |
|   | Medium grey         | 8 634 92 |
|   | Black               | 8 635 92 |
|   | Pearl               | 8 636 92 |
|   | Dark grey           | 8 637 92 |
|   | Brushed aluminium   | 8 638 92 |
|   | Brushed medium grey | 8 649 92 |


**2. RANGE (continued)**
**3-gang plates**

71 mm spacing - horizontal and vertical

|  |                     |          |
|--|---------------------|----------|
|  | Atoll               | 8 630 93 |
|  | White               | 8 631 93 |
|  | Old pink            | 8 632 93 |
|  | Aluminium           | 8 633 93 |
|  | Medium grey         | 8 634 93 |
|  | Black               | 8 635 93 |
|  | Pearl               | 8 636 93 |
|  | Dark grey           | 8 637 93 |
|  | Brushed aluminium   | 8 638 93 |
|  | Brushed medium grey | 8 649 93 |


**4-gang plates**

71 mm spacing - horizontal and vertical

|  |                     |          |
|--|---------------------|----------|
|  | Atoll               | 8 630 94 |
|  | White               | 8 631 94 |
|  | Old pink            | 8 632 94 |
|  | Aluminium           | 8 633 94 |
|  | Medium grey         | 8 634 94 |
|  | Black               | 8 635 94 |
|  | Pearl               | 8 636 94 |
|  | Dark grey           | 8 637 94 |
|  | Brushed aluminium   | 8 638 94 |
|  | Brushed medium grey | 8 649 94 |

**5-gang plates**

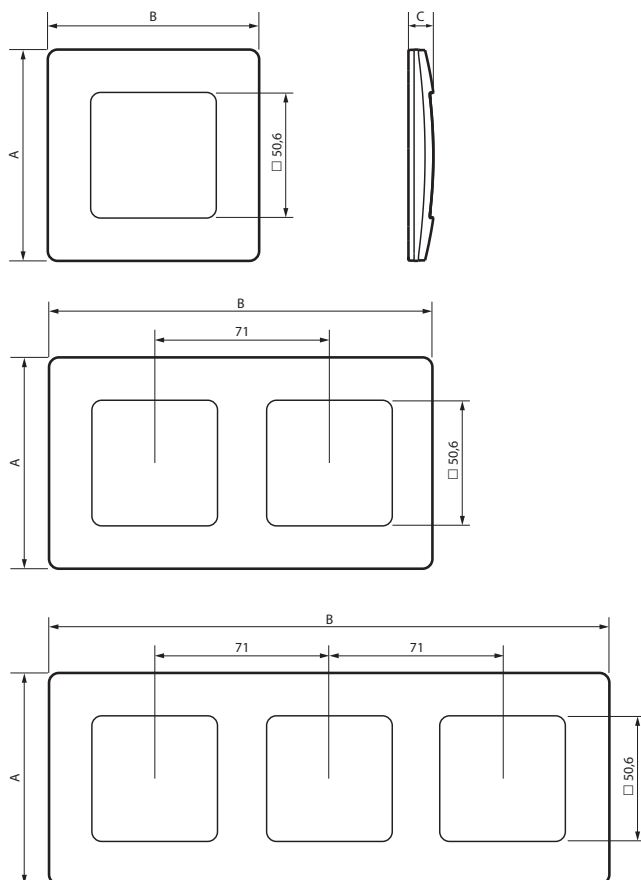
71 mm spacing - horizontal and vertical

|  |                     |          |
|--|---------------------|----------|
|  | Atoll               | 8 630 95 |
|  | White               | 8 631 95 |
|  | Old pink            | 8 632 95 |
|  | Aluminium           | 8 633 95 |
|  | Medium grey         | 8 634 95 |
|  | Black               | 8 635 95 |
|  | Pearl               | 8 636 95 |
|  | Dark grey           | 8 637 95 |
|  | Brushed aluminium   | 8 638 95 |
|  | Brushed medium grey | 8 649 95 |

# Niloé™ Step Cover plates

Cat. No(s): 8 630 91/92/93/94/95 - 8 631 91/92/93/94/95 - 8 632 91/92/93/94/95  
8 633 91/92/93/94/95 - 8 634 91/92/93/94/95 - 8 635 91/92/93/94/95  
8 636 91/92/93/94/95 - 8 637 91/92/93/94/95 - 8 638 91/92/93/94/95  
8 639 91/92/93/94/95

## 3. OVERALL DIMENSIONS (mm)



|                                | A  | B   | C  |
|--------------------------------|----|-----|----|
| 1-gang                         | 86 | 86  | 10 |
| 2-gang<br>71 mm fixing centres | 86 | 157 | 10 |
| 3-gang<br>71 mm fixing centres | 86 | 228 | 10 |
| 4-gang<br>71 mm fixing centres | 86 | 299 | 10 |
| 5-gang<br>71 mm fixing centres | 86 | 370 | 10 |

## 4. TECHNICAL CHARACTERISTICS

### ■ 4.1 Materials

Matt surface appearance

Material: - ABS plate

- Halogen-free

- UV resistant

Self-extinguishing:

+ 850°C/30 s for insulating parts holding live parts in place

+ 650°C/30 s for other parts made of insulating materials

### ■ 4.2 Climatic characteristics

Storage and usage temperature: - 5°C to + 35°C

## 5. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution:** An initial test is required for the use of other special maintenance products.