



Dorado Smart Light 1-Kit DownLight

Masterbox	Qty 6
Size	D: 5,4 cm, H: 5,4 cm, Ø: 8,5 cm
Material	Plastic/Metal
IP Class	IP65, Class 2
Light source	Fixed LED, Incl. 4,7W LED, Lumen 380, Kelvin 2200-6500, Life hours 20.000, RA 80, Beam angle 36°, Not dimmable
Features	IP 65 protection for both outdoor and bathroom use, Bluetooth connection to Nordlux Smart Light, Adjustable kelvin and lumen output, 5 year LED guarantee

Recess 3-Kit LED COB DownLight

Masterbox	Qty 3
Size	H: 7,95 cm, Ø: 8,15 cm, Mounting min. height: 15 cm Cut-out Ø: 7,5 cm, 5.4 Ltr. Tilt angle: 25°
Material	Metal
IP Class	IP23, Class 2
Cable	Cable: Black 200 cm replaceable
Light source	GU10, Max. 3X35W, Incl. 3X3W COB, Lumen 3X175, Kelvin 3000, Candela 350, Life hours 25.000, RA 80, Beam angle 38°, Not dimmable Light source energy class A+
Features	Cable 2,0m included, Parallel connection possible

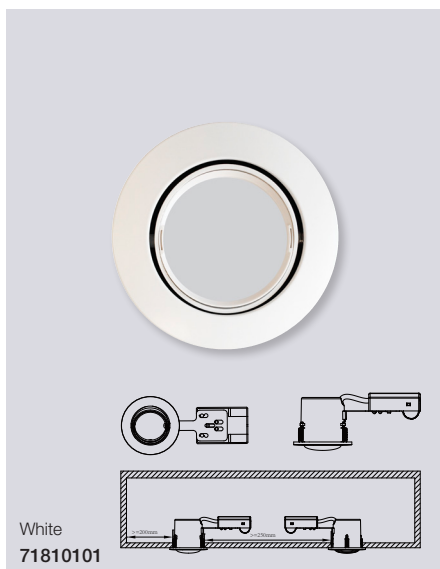

Mixit Pro DownLight

Masterbox	Qty 3
Size	H: 7,2 cm, Ø: 8,5 cm, Mounting min. height: 6,5 cm Cut-out Ø: 7,6 cm, Tilt angle: 30°
Material	Plastic/Metal
IP Class	IP23, Class 2
Light source	GU10, Max. 8W LED, Excl. light source,
Features	Ideally suited for combination with NORDLUX SMART, Can be mounted directly into insulation, Parallel connection possible