

HALMSTAD





HALMSTAD Heavy duty galvanized steel or galvanized and powder coated bollard with opal polycarbonate lens.

| Art | Watt | Class | Type of light source: | Luminous flux | Colour temperature | Lifetime (L70/B50) | EEL | Height (cm) | Dimmable |
|------|------|-------|-----------------------|---------------|--------------------|--------------------|-------|-------------|------------|
| 210 | - | II | E27 | - | - | - | A+..D | 26cm | - |
| 212 | 8,5W | II | LED E27 | 252 lm | 2700K | 25 000h | A+ | 26cm | Dim. Triac |
| 211 | 10W | I | LED | 252 lm | 3000K | 50 000h | A+ | 26cm | Dim. Triac |
| 295 | - | II | E27 | - | - | - | A+..D | 49cm | - |
| 1488 | 8,5W | II | LED E27 | 252 lm | 2700K | 25 000h | A+ | 49cm | Dim. Triac |
| 1489 | 10W | I | LED | 252 lm | 3000K | 50 000h | A+ | 49cm | Dim. Triac |
| 296 | - | II | E27 | - | - | - | A+..D | 85cm | - |
| 1483 | 8,5W | II | LED E27 | 252 lm | 2700K | 25 000h | A+ | 85cm | Dim. Triac |
| 1482 | 10W | I | LED | 252 lm | 3000K | 50 000h | A+ | 85cm | Dim. Triac |

Accessories for Halmstad

| | | |
|-----|-------------------|--------|
| 205 | Concreting anchor | p. 114 |
| 206 | Anchoring support | p. 114 |

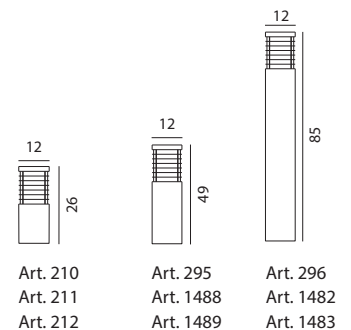

Art. 212, 1488 i 1483: 8,5W LED E27 included, 806 lm, 2700K, 25000h, dimmable, EEL: A+

* **Halmstad with 4000K** available by request, contact your supplier.