


MOTIVE LED M

■ painted aluminum, plastic PC

■ 10311 3000K ■ 10852 4000K

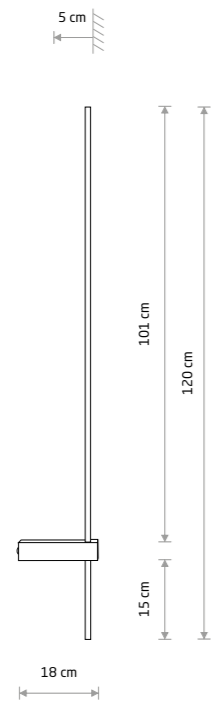

MOTIVE LED L

■ painted aluminum, plastic PC

■ 10313 3000K ■ 10851 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10311	11W LED	3000K	380 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10852	11W LED	4000K	410 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10313	16W LED	3000K	540 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10851	16W LED	4000K	570 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

■ BLACK P013 RAL 9005



MOTIVE LED M 10311

MOTIVE LED L 10313