

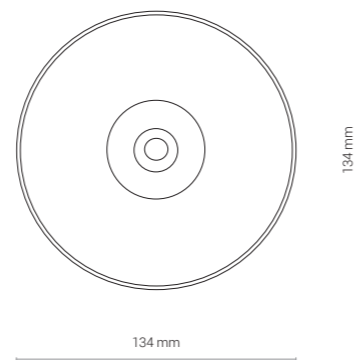
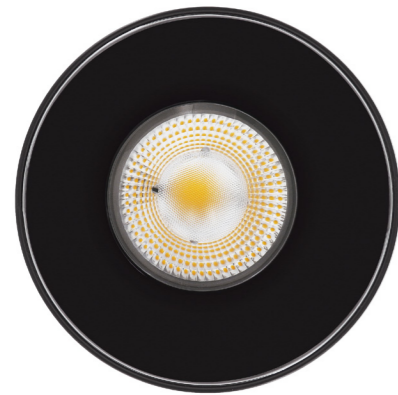


# CL IOS LED 20W

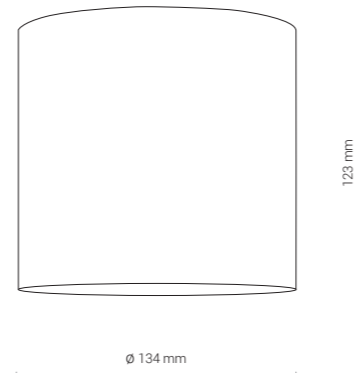


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

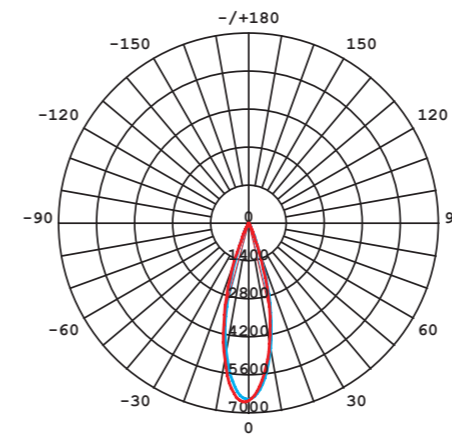


Luminous intensity [cd]  
C0-C180 — (red line)  
C90-C270 — (blue line)

Beam cone diagram  
Beam angle 36°

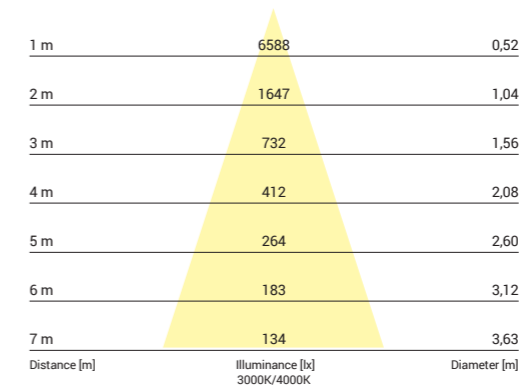


8736, 8737, 8738, 8740, 20W, 3000K, 4000K, beam angle 36°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

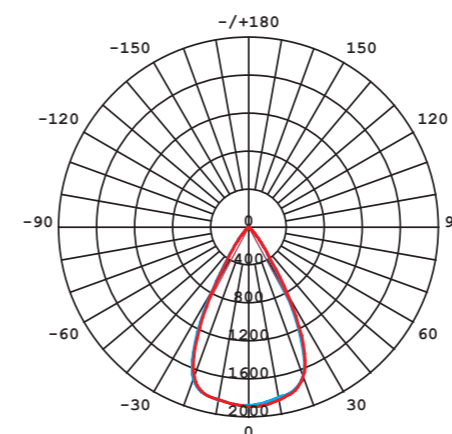

Luminous intensity [cd]  
C0-C180 — (red line)  
C90-C270 — (blue line)

Beam cone diagram  
Beam angle 60°

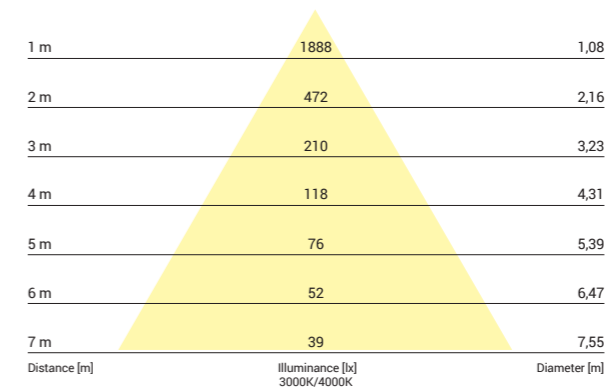

8741, 8742, 8743, 8744, 20W, 3000K, 4000K, beam angle 60°

## CL IOS LED 20W, 36°

aluminium / aluminum / алюминий

- 8740 ○ WH - 3000K    8737 ● BL - 3000K
- 8738 ○ WH - 4000K    8736 ● BL - 4000K

## CL IOS LED 20W, 60°

aluminium / aluminum / алюминий

- 8744 ○ WH - 3000K    8742 ● BL - 3000K
- 8743 ○ WH - 4000K    8741 ● BL - 4000K

Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LED BRAND	DRIVER BRAND	LIFETIME	WARRANTY
8744	20W	3000K	1600	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8743	20W	4000K	1600	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8742	20W	3000K	1600	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8741	20W	4000K	1600	60°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8740	20W	3000K	1600	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8738	20W	4000K	1600	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8737	20W	3000K	1600	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS
8736	20W	4000K	1600	36°	≥90	20	BRIGHTLUX	OSRAM	50000h	5 YEARS