

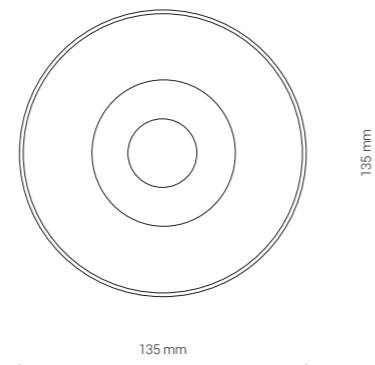


CL IOS LED 30W

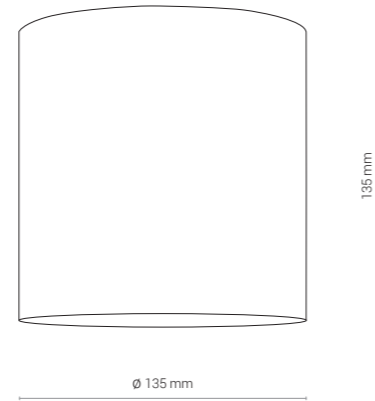


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

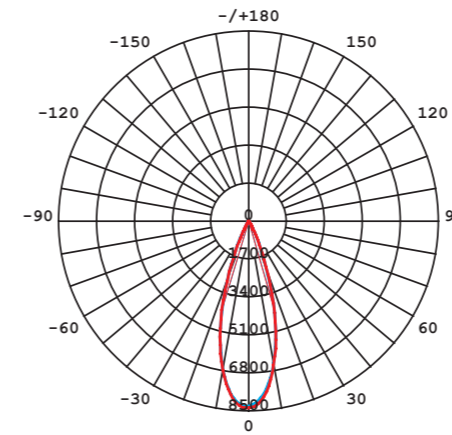


Luminous intensity [cd]
C0-C180 ———
C90-C270 ———

Beam cone diagram
Beam angle 36°

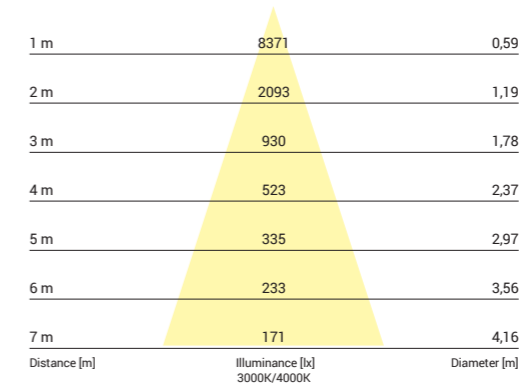


8727, 8728, 8730, 8731, 30W, 3000K, 4000K, beam angle 36°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

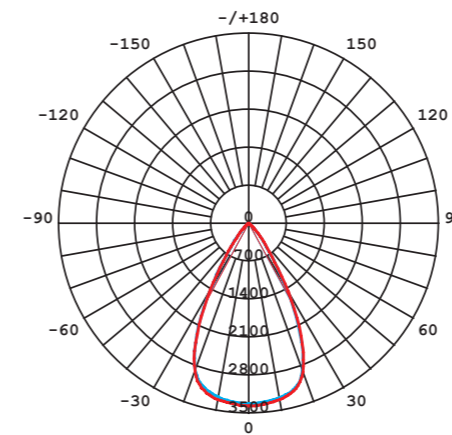

Luminous intensity [cd]
C0-C180 ———
C90-C270 ———

Beam cone diagram
Beam angle 60°

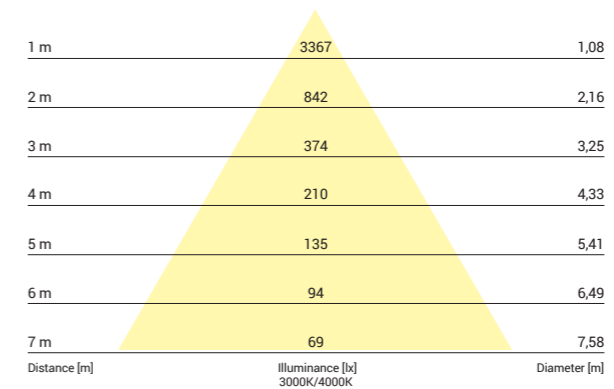

8732, 8733, 8734, 8735, 30W, 3000K, 4000K, beam angle 60°

CL IOS LED 30W, 36°

aluminium / aluminum / алюминий

- 8731 ○ WH - 3000K 8728 ● BL - 3000K
8730 ○ WH - 4000K 8727 ● BL - 4000K

CL IOS LED 30W, 60°

aluminium / aluminum / алюминий

- 8735 ○ WH - 3000K 8733 ● BL - 3000K
8734 ○ WH - 4000K 8732 ● BL - 4000K

| Item No. | POWER | COLOUR TEMP. | LUMEN | BEAM ANGLE | CRI | IP | LED BRAND | DRIVER BRAND | LIFETIME | WARRANTY |
|----------|-------|--------------|-------|------------|-----|----|-----------|--------------|----------|----------|
| 8735 | 30W | 3000K | 2700 | 60° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8734 | 30W | 4000K | 2700 | 60° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8733 | 30W | 3000K | 2700 | 60° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8732 | 30W | 4000K | 2700 | 60° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8731 | 30W | 3000K | 2700 | 36° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8730 | 30W | 4000K | 2700 | 36° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8728 | 30W | 3000K | 2700 | 36° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |
| 8727 | 30W | 4000K | 2700 | 36° | ≥90 | 20 | BRIGHTLUX | OSRAM | 50000h | 5 YEARS |