
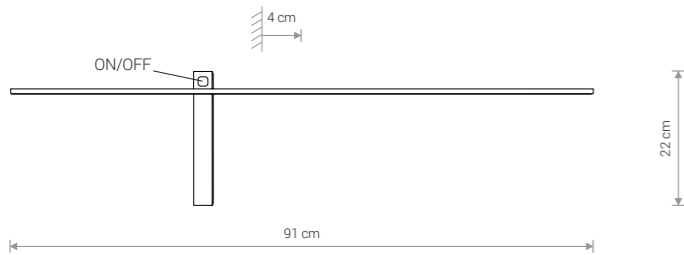


IMPULSE LED S

aluminium, PC / aluminium, PC / алюминий, PC



8115 ● BL

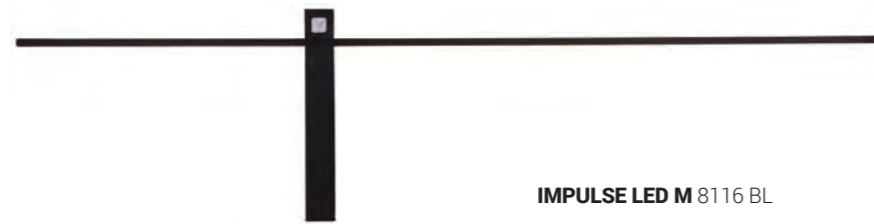

IMPULSE LED M

aluminium, PC / aluminium, PC / алюминий, PC

8116 ● BL

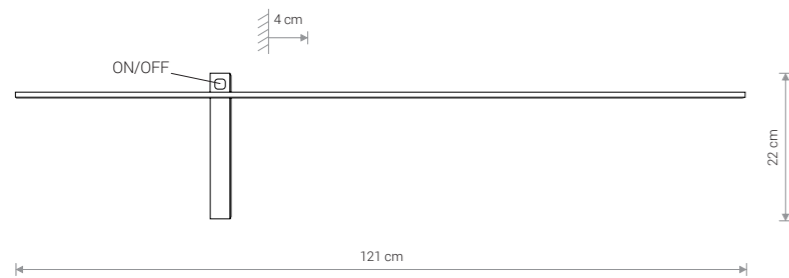
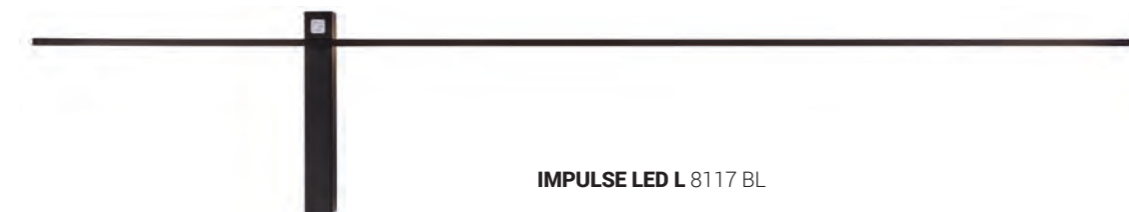


IMPULSE LED L

aluminium, PC / aluminium, PC / алюминий, PC

8117 ● BL


| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8115 | 6W | 3000K | 200 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,5 | □ | IP23 | 30 000h |
| 8116 | 10W | 3000K | 350 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,5 | □ | IP23 | 30 000h |
| 8117 | 15W | 3000K | 380 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,5 | □ | IP23 | 30 000h |

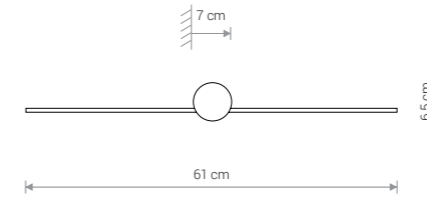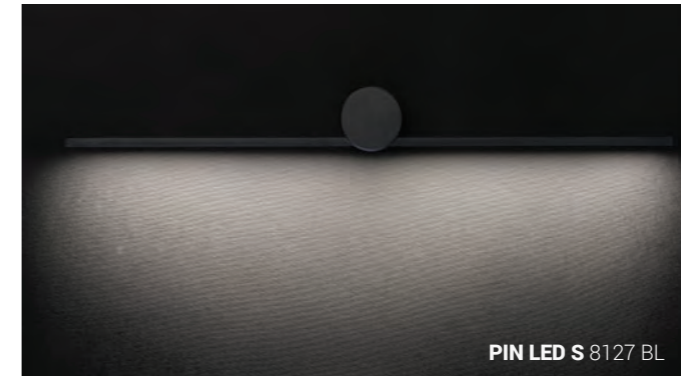

PIN LED S

aluminium, PC / aluminium, PC / алюминий, PC


8127 ● BL

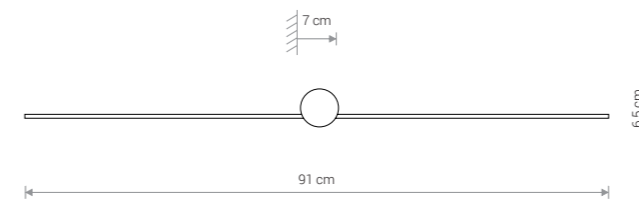

PIN LED M

aluminium, PC / aluminium, PC / алюминий, PC

8128 ● BL

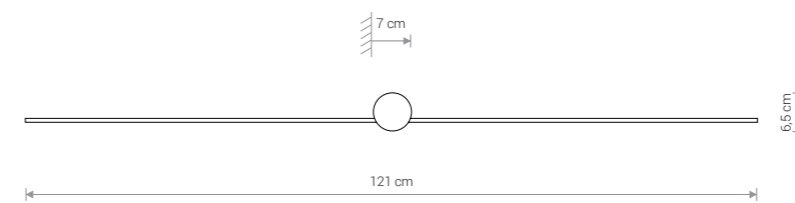

PIN LED L

aluminium, PC / aluminium, PC / алюминий, PC

8130 ● BL

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8127 | 6W | 4000K | 280 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,9 | □ | IP44 | 30 000h |
| 8128 | 10W | 4000K | 500 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,9 | □ | IP44 | 30 000h |
| 8130 | 15W | 4000K | 540 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,9 | □ | IP44 | 30 000h |