




ELLIPSES LED 8140 WH



ELLIPSES LED 8182 BL



ELLIPSES LED 8181 BL/G




## ELLIPSES LED

aluminium / aluminum / алюминий

8181 BL/G 8182 BL 8140 WH


| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT              | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8181     | 2x5W  | 3000K        | 600 lm        | 180°       | 90                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 10 000h  |
| 8182     | 2x5W  | 3000K        | 600 lm        | 180°       | 90                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 10 000h  |
| 8140     | 2x5W  | 3000K        | 600 lm        | 180°       | 90                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 10 000h  |

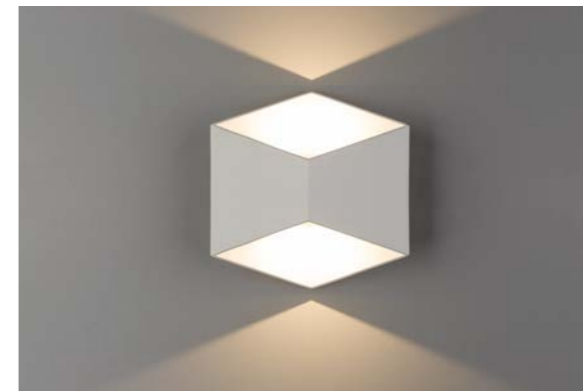


TRIANGLES LED 8143 WH



TRIANGLES LED 8142 BL

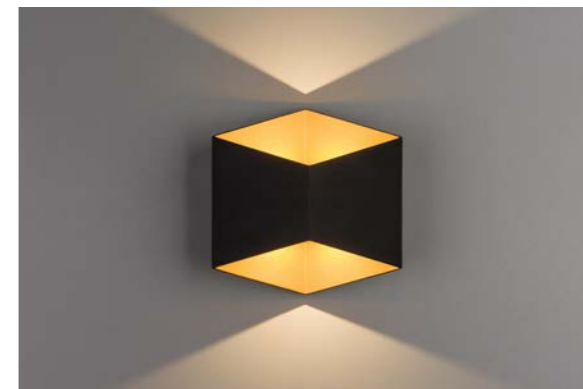

TRIANGLES LED 8141 BL/G



## TRIANGLES LED

aluminium / aluminum / алюминий

8141 BL/G 8142 BL 8143 WH

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT              | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8141     | 2x5W  | 3000K        | 450 lm        | 180°       | 90                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 10 000h  |
| 8142     | 2x5W  | 3000K        | 450 lm        | 180°       | 90                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 10 000h  |
| 8143     | 2x5W  | 3000K        | 450 lm        | 180°       | 90                             | ~220-230V, 50/60Hz | 0,5          | ⊕            | IP54               | 10 000h  |