




**ION LED M** 8171 CH

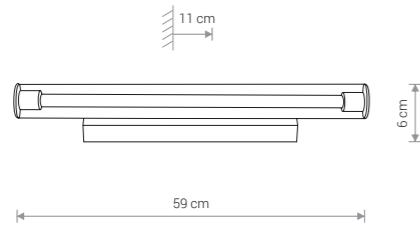


### ION LED M

szkło, stal chromowana / glass, chrome finish /  
стекло, хромированная отделка

8171 ● CH



**PICASSO LED** 8131 CH

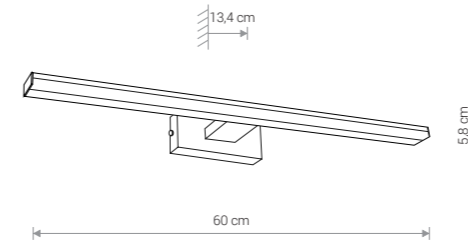


### PICASSO LED

aluminium, PC / aluminium, PC / алюминий, PC

8131 ● CH



**ION LED L** 8172 CH

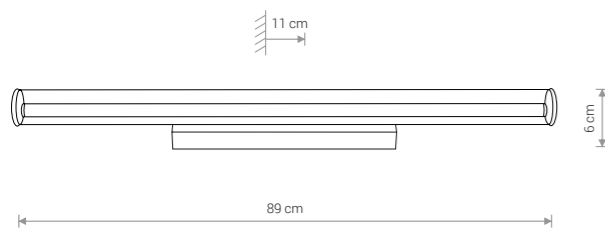


### ION LED L

szkło, stal chromowana / glass, chrome finish /  
стекло, хромированная отделка

8172 ● CH



**LATH LED** 8175 CH

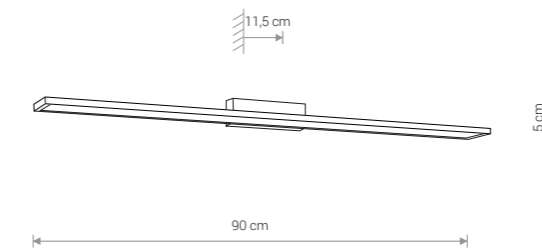

### LATH LED

stal chromowana, PC / electroplated steel, PC /  
гальваническая сталь, PC

8175 ● CH

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8171	12W	3000K	1000 lm	120°	80	~220-230V, 50/60Hz	0,5	⊕	IP20	30 000h
8172	18W	3000K	1400 lm	120°	80	~220-230V, 50/60Hz	0,5	⊕	IP20	30 000h

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8131	12W	4000K	900 lm	120°	80	~220-230V, 50/60Hz	0,5	⊕	IP44	30 000h
8175	16W	4000K	430 lm	120°	80	~220-230V, 50/60Hz	0,5	⊕	IP44	20 000h