


TUBE LED T8, 11W
glass

7500



TUBE LED T8, 16W
glass

7501

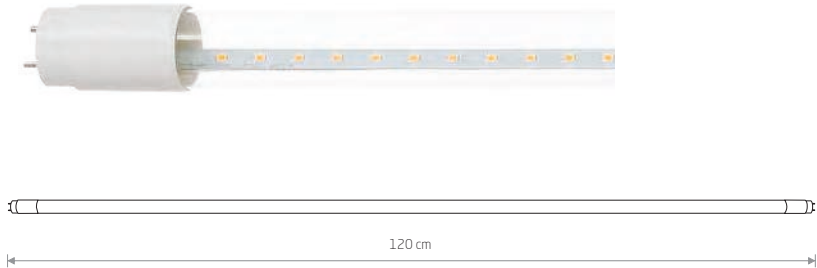

TUBE LED T8, 22W
glass

7502


Item No.	Power	Colour temp.	Leds	Luminous flux	Beam angle	Colour Rendering Index (CRI ≥)	Input	Power factor	Lifetime
7500	11W LED	3000K	SMD2835	1700 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0,5	30000h
7501	16W LED	3000K	SMD2835	2300 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0,5	30000h
7502	22W LED	3000K	SMD2835	3200 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0,5	30000h



WATERPROOF
CONNECTOR IP68
plastic PA

8845


IP68

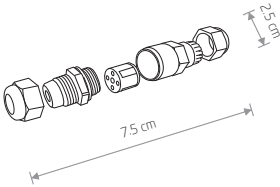

WATERPROOF „Y”
CONNECTOR IP68
plastic PA


8846

IP68

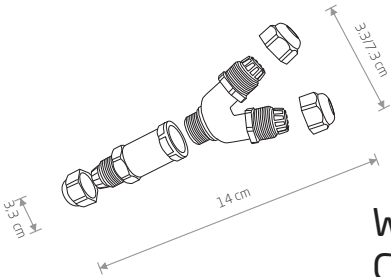

MICROWAVE SENSOR
plastic

8821

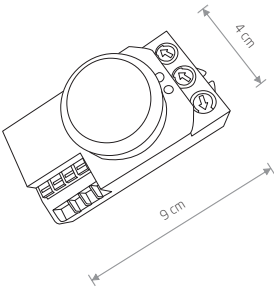

DUPLEX
plastic PC

9341

2xE27, max 40W