

06 Downlights Fixed LED&gt;UGR19 Office Range

10130U/W/W



30W SMD LED UGR19 downlight, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

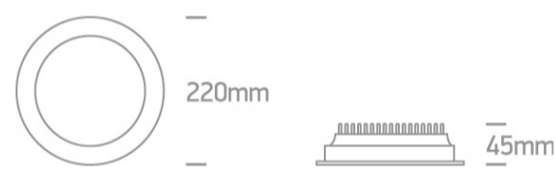

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

UGR19 Office Range

Order Code

10130U/W/W

Colour

White

Material

Die Cast

Shape



Circular


Height

45mm

Diameter	220mm
Cutout Hole Diameter	205mm
Recessed Ceiling	Yes
Depth Required	65mm
Indoor	Yes
Adjustable	No
IK Rating	4

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	750mA
Voltage	38V
Safety Class	
Power(Watts)	28,5W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835



## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

19,75-30W

Power Factor

0,9

Constant Current

Yes

750mA

25-40V

IP Rating

IP44

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

3000K

Lumen Output

2250lm

Light Efficiency

75lm/W

CRI

80

Illumination Diagram



UGR

19

## Packing Info

Pcs/Carton

10

Barcode

5291889065388

Завантажено з e27.com.ua

HS Code

9405409900

## Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

