

06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

10148P/W/D



Recessed circular LED panel.

Complete with 1200mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

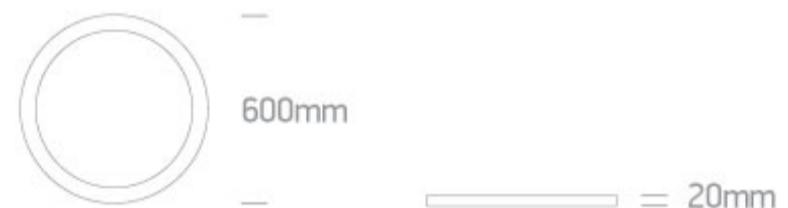

Gallery



Related items



89050L



89050TLD

Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 40-48W Round Recessed Panels Die Cast

Order Code

10148P/W/D

Завантажено з e27.com.ua

Colour

White

Material

Die Cast

Shape

Circular

Height

14mm

Diameter

600mm

Cutout Hole Diameter

585mm

Recessed T-Ceiling

Yes

Depth Required

80mm

Indoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

48W

IP Rating

IP20

Light Source

LED built in

Dimmable

Yes

Dimmer type

Triac

F Mark



Fitting

Input Type

Constant Current

Input Current

1200mA

Voltage

36V



Safety Class	III
Power(Watts)	43,2W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	43,2-50,4W
Power Factor	0,95
Constant Current	Yes
1200mA	36-42V
IP Rating	IP20
Safety Class	
Dimmable	Yes
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Output Terminal	Cable
Brand	ID
Protection	No-Load, Short Circuit

Illumination Data

Colour Temperature	6000K
Lumen Output	3200lm
Light Efficiency	66,67lm/W
CRI	80
Beam Angle	120°



Packing Info

Box Weight	4,4Kg
Pcs/Carton	2
Barcode	5291889038351
HS Code	9405109890

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

