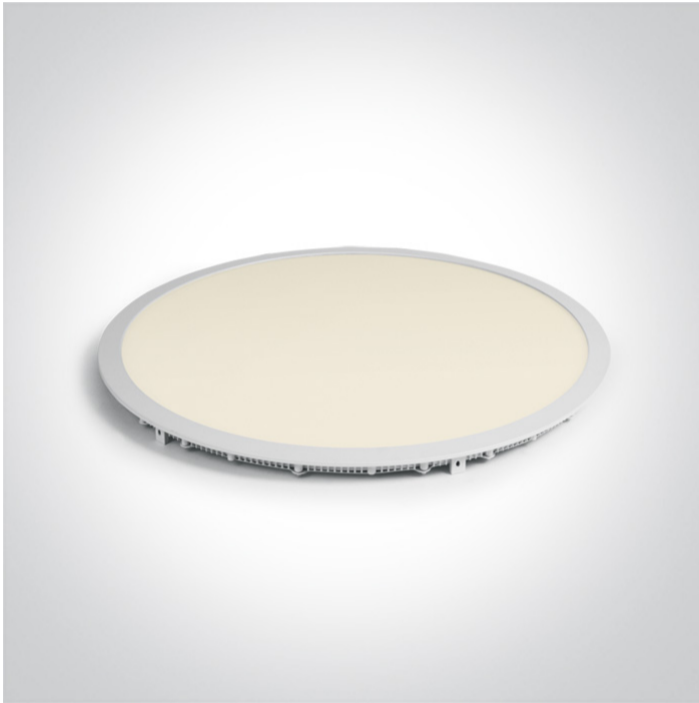


06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

10148PE/W/W

48W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

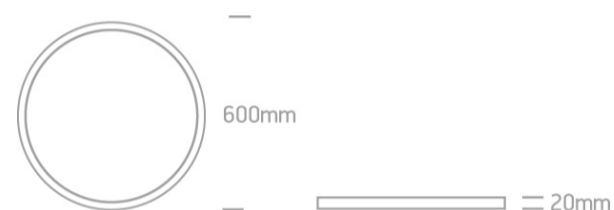

Must be ordered separately



89048

Related items



89048T



89050L



89050TLD

Physical Specification

Item Group

06 Downlights Fixed LED

Family	The 40-48W Round Recessed
Order Code	10148PE/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	20mm
Diameter	600mm
Cutout Hole Diameter	585mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	1200mA
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

Illumination Data

Colour Temperature	3000K
Lumen Output	3500lm

Light Efficiency

72,91lm/W

[Завантажено з e27.com.ua](http://e27.com.ua)

CRI

80

Beam Angle

120°

Illumination Diagram



Packing Info

Box Length

72cm

Box Width

65cm

Box Height

4,5cm

Box Weight

3,3Kg

Pcs/Carton

4

Barcode

5291889041863

HS Code

9405109890

Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to
one light!

one
LIGHT

