

06 Downlights Fixed LED&gt;The COB Downlight Range Die Cast

10107CA/W/W



7W LED recessed downlight, IP20. Ideal for general lighting applications.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

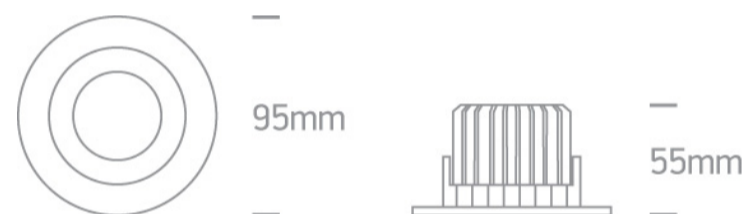

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The COB Downlight Range Die Cast

Order Code

10107CA/W/W

Colour

White

Material

Die Cast

Shape



Circular

Height


55mm

|                      |      |
|----------------------|------|
| Diameter             | 95mm |
| Cutout Hole Diameter | 75mm |
| Recessed Ceiling     | Yes  |
| Depth Required       | 70mm |
| Indoor               | Yes  |
| Adjustable           | No   |

## Electrical Characteristics

| Gear             | External-Included   |
|------------------|---|
| Fitting + Driver |   |
| Input Voltage    | 220-240V  |
| 50 Hz            | Yes   |
| 60 Hz            | Yes   |
| Safety Class     |  |
| Power(Watts)     | 7W  |
| IP Rating        | IP20  |
| Light Source     | LED built in  |
| Dimmable         | No  |
| F Mark           |  |

## Fitting

|               |   |
|---------------|---|
| Input Type    | Constant Current  |
| Input Current | 300mA   |
| Voltage       | 21V   |
| Safety Class  |  |
| Power(Watts)  | 6,3W  |
| IP Rating     | IP20  |
| Light Source  | LED built in  |
| LED Type      | COB   |
| LED Brand     | Epistar   |

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2-7,2W

Power Factor

0,9

Constant Current

Yes

300mA

14-24V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

3000K

Lumen Output

560lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

60°

Illumination Diagram



## Packing Info

|            |               |
|------------|---------------|
| Box Length | 12,5cm        |
| Box Width  | 6cm           |
| Box Height | 10,5cm        |
| Box Weight | 0,240Kg       |
| Pcs/Carton | 50            |
| Barcode    | 5291889051961 |
| HS Code    | 9405409900    |

## Certification &amp; Warranty

|                  |          |
|------------------|----------|
| Warranty         | 2 Years  |
| Average Lifetime | 30000hrs |
| Weee Directive   | Yes      |

switch to  
**one light!**

one  
LIGHT

