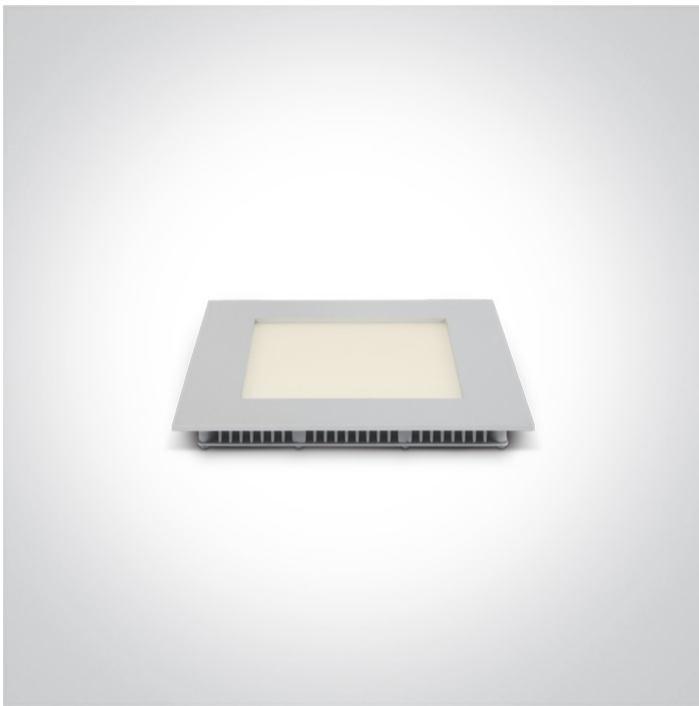


06 Downlights Fixed LED&gt;The 8-16W Square Recessed Panels Die cast

**50116FA/W/W**

16W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 350mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads




## Dimensions

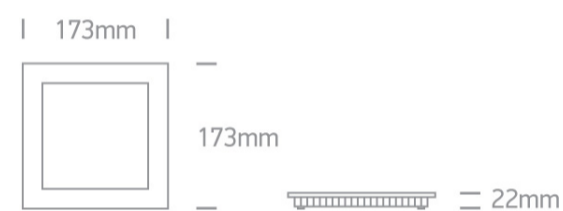

## Gallery



## Related items



89016UT

## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 8-16W Square Recessed Panels Die cast

Order Code

50116FA/W/W

Завантажено з e27.com.ua

Colour

White

Material

Die Cast

Diffuser Material

Acrylic

Shape

Rectangular

Length

173mm

Width

173mm

Height

22mm

Cutout Hole Width

155mm

Cutout Hole Length

155mm

Recessed Ceiling

Yes

Depth Required

50mm

Indoor

Yes

Adjustable

No

#### Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

16W

IP Rating

IP40

Light Source

LED built in

Dimmable

No


F Mark




Fitting

Input Type

Constant Current

Input Current	350mA
Voltage	42V
Safety Class	
Power(Watts)	14,7W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	84

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,5-14,7W
Power Factor	0,6
Constant Current	Yes
350mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Brand	Lifud

## Illumination Data

Colour Temperature	3000K
Lumen Output	960lm
Light Efficiency	60lm/W

CRI

80

Завантажено з e27.com.ua

Beam Angle

120°

Illumination Diagram



#### Packing Info

Box Length

23,6cm

Box Width

18cm

Box Height

18cm

Box Weight

0,460Kg

Pcs/Carton

30

Barcode

5291889044307

HS Code

9405109890

#### Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

