


06 Downlights Fixed LED>The Rectangular Panels Aluminium

50148RE/W/D

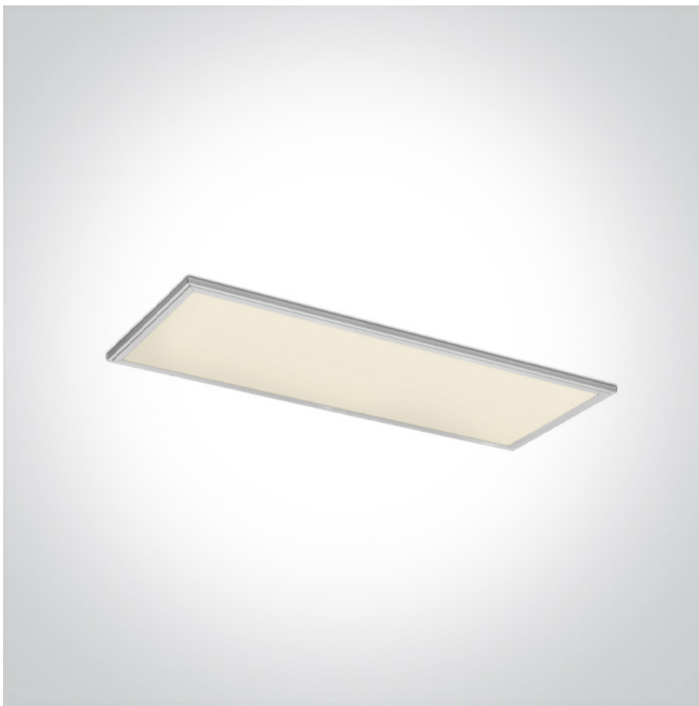

120x30 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

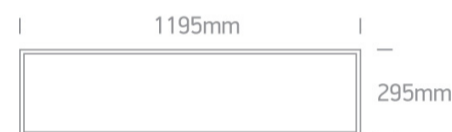

Must be ordered separately



89048

Accessories



050017



050108



89048T



89050L



89050TLD

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Rectangular Panels Aluminium
Order Code	50148RE/W/D
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular
Length	1195mm
Width	295mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	38V
Safety Class	III
Power(Watts)	48W
IP Rating	IP20

Light Source

LED built in

[Завантажено з e27.com.ua](http://e27.com.ua)

LED Type

SMD 2835

LED Brand

Epistar

LED Number

240

Illumination Data

Colour Temperature

6000K

Lumen Output

4100lm

Light Efficiency

85,41lm/W

CRI

80

Beam Angle

120°

Illumination Diagram



Packing Info

Pcs/Carton

4

Barcode

5291889041986

HS Code

9405109890

Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to
one light!

one
LIGHT

