


## 06 Downlights Fixed LED&gt;The Rectangular Panels Aluminium

## 50148RE/W/W

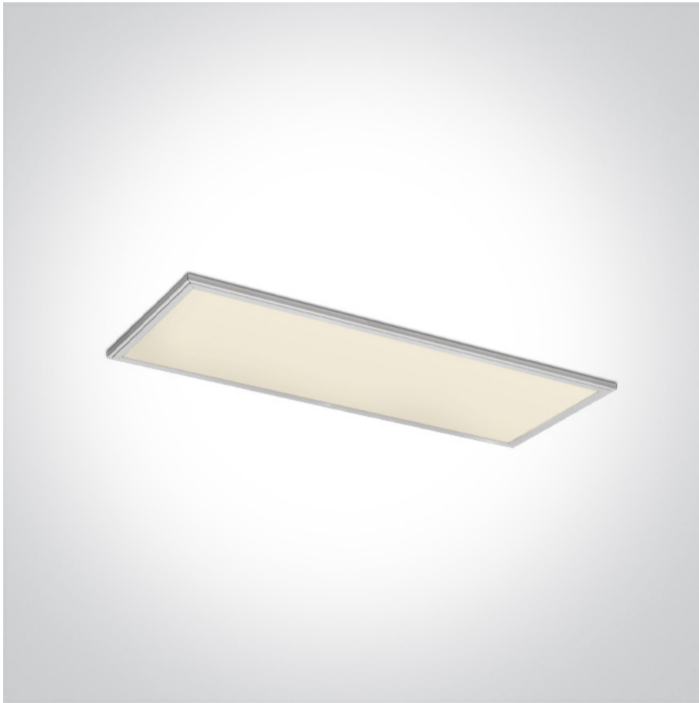

120x30 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

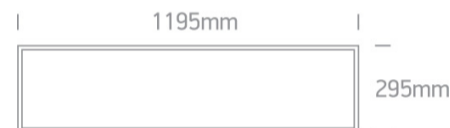

## Must be ordered separately



89048

## Accessories



050017



050108



89048T



89050L



89050TLD

Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Rectangular Panels Aluminium
Order Code	50148RE/W/W
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular
Length	1195mm
Width	295mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	38V
Safety Class	III
Power(Watts)	48W
IP Rating	IP20

Light Source

LED built in

[Завантажено з e27.com.ua](http://e27.com.ua)

LED Type

SMD 2835

LED Brand

Epistar

LED Number

240

#### Illumination Data

Colour Temperature

3000K

Lumen Output

3900lm

Light Efficiency

81,25lm/W

CRI

80

Beam Angle

120°

Illumination Diagram



#### Packing Info

Pcs/Carton

4

Barcode

5291889041962

HS Code

9405109890

#### Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

