

## 04 Recessed Spots Adjustable LED&gt;Moving Inner Cylinder Range

51110C/W/W



10W COB LED Adjustable Dark Light recessed spot IP20.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

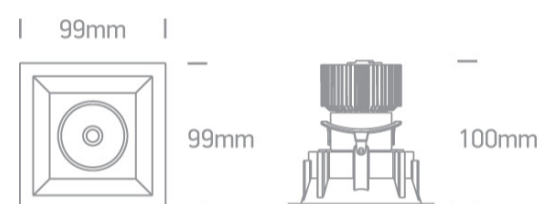

## Gallery



## Physical Specification

Product Type

Item Group

Family

Order Code

Colour

Material

Shape

Gear

04 Recessed Spots Adjustable LED

Moving Inner Cylinder Range

51110C/W/W



White


Aluminium

Rectangular

Length	99mm
Width	99mm
Height	100mm
Cutout Hole Width	85mm
Cutout Hole Length	85mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Cable Length	40cm
F Mark	


Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	18,5V
Safety Class	
Power(Watts)	9,25W

IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1

## Gear


Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	6-12W
Power Factor	0,5
Constant Current	Yes
500mA	12-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	80°C
Manufacturer	Eaglerise

## Illumination Data

Colour Temperature	3000K
Lumen Output	650lm
Light Efficiency	65lm/W
CRI	80
Beam Angle	24°
Illumination Diagram	
Dark Light	Yes

Box Length	11,5cm
Box Width	11,5cm
Box Height	14cm
Box Weight	0,465Kg
Pcs/Carton	36
Barcode	5291889046691
HS Code	9405409900

## Energy Label

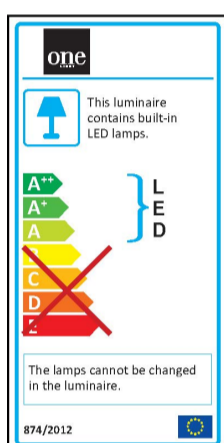

## Certification &amp; Warranty

Warranty	2 Years
Wee Directive	Yes

switch to  
**one light!**

one  
LIGHT

