

07 Downlights Adjustable LED&gt;The COB Square Downlights Die cast

**51140B/W/C**

40W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

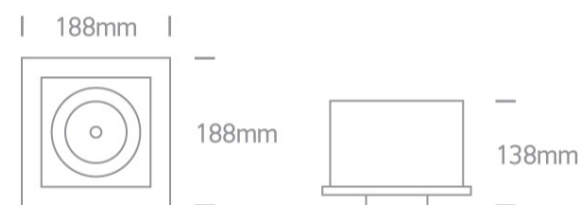

## Gallery



## Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The COB Square Downlights Die cast

Order Code

51140B/W/C

Colour

White

Material

Die Cast

Shape



Rectangular


Length

188mm

Width	188mm
Height	138mm
Cutout Hole Width	170mm
Cutout Hole Length	170mm
Recessed Ceiling	Yes
Depth Required	160mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	37,3V
Safety Class	
Power(Watts)	37,3W
IP Rating	IP20
Light Source	LED built in

LED Type

COB

Завантажено з e27.com.ua

LED Brand

Bridgelux

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

24-40W

Power Factor

0,9

Constant Current

Yes

1000mA

24-40V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

## Illumination Data

Colour Temperature

4000K

Lumen Output

3300lm

Light Efficiency

82,5lm/W

CRI

80

Beam Angle

36°

Illumination Diagram



## Packing Info

Box Weight

2kg

Pcs/Carton

8

Barcode

5291889044796

HS Code

9405409900

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

