

Giotto

Suspensions for interior equipped with SMD LEDs, structure in aluminum and metal electrostatically painted in mat white or mat black, diffuser of opal white silicone.



01-1735



Giotto

Suspensions for interior equipped with SMD LEDs, structure in aluminum and metal electrostatically painted in mat white or mat black, diffuser of opal white silicone.

Serie de suspensii pentru interior echipate cu LED-uri SMD, structură din aluminiu și metal vopsit în câmp electrostatic alb mat sau negru mat, dispersor din silicon alb opal.

Sospensioni per interni, equipaggiate con SMD LED, struttura in alluminio e metallo verniciata a polveri bianco opaco o nero opaco, diffusore in silicone opalino bianco.

Серия люстр для интерьера, оснащенных светодиодами SMD, структура из алюминия и металла окрашенного в электростатическом поле в белый матовый или черный матовый цвет, рассеиватель из белого опалового силикона.


Beltéri függesztékek, SMD LED-el szerelve, elektrosztatikus mezőben matt fehérre vagy matt feketére festett alumínium és fém szerkezet, szilikon fehér opál diszperzór.

Интериорен осветител от SMD LED, корпус от алуминий и стомана в бял или черен мат, дифузер от бял силикон.

Závesné interiérové svietidlo, vybavené LED diódami SMD, konštrukcia z hliníka a kovu elektrostaticky lakovaná v matnej bielej alebo matnej čiernej farbe, difuzor z opálového bieleho silikónu.





Technical info

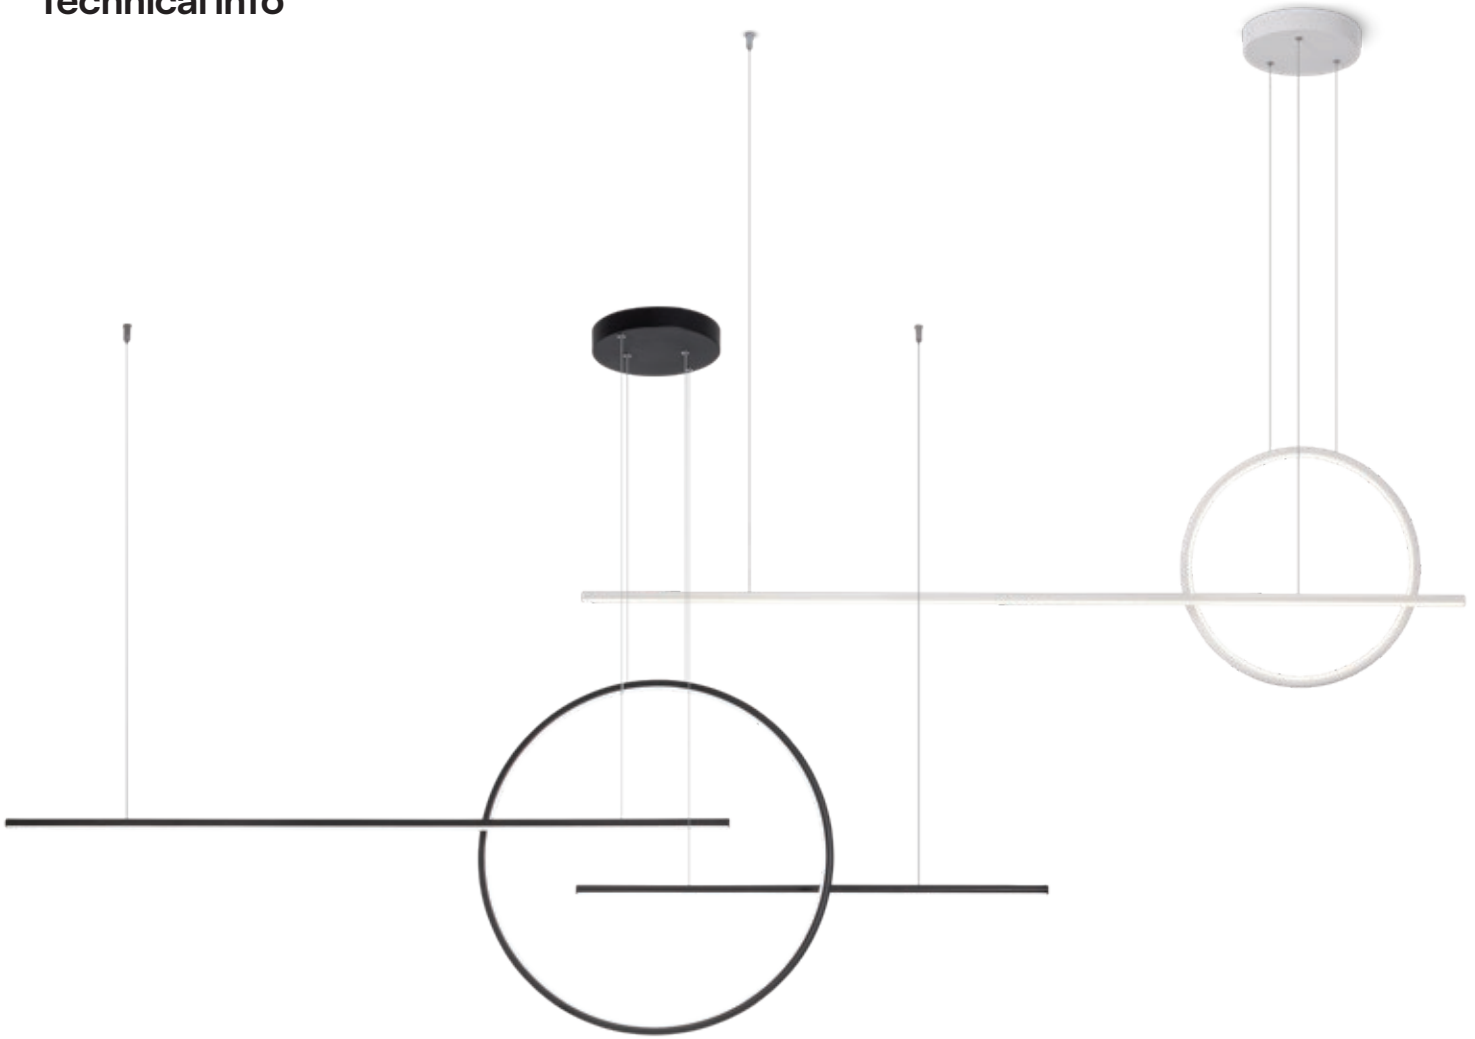

- art. 01-1736 Mat White 3000K
- art. 01-1737 Mat Black 3000K
- art. 01-1849 Mat White 4000K
- art. 01-1850 Mat Black 4000K

- art. 01-1734 Mat White 3000K
- art. 01-1735 Mat Black 3000K
- art. 01-1847 Mat White 4000K
- art. 01-1848 Mat Black 4000K

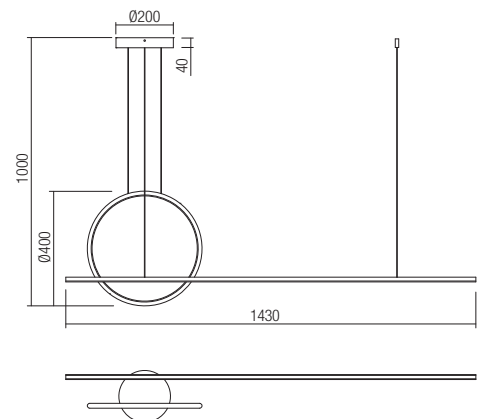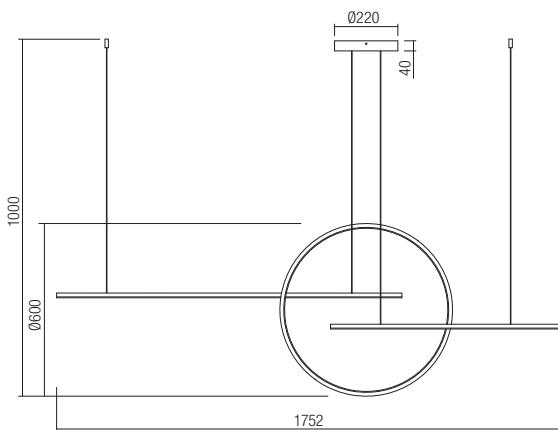

Led type	SMD LED 2835 468 pcs x 0,15W	
Power	66W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	6864 lm	7275 lm
Lumen system	5016 lm	5286 lm
CRI	80	
Dimmable (3 step)	☉	

CE IP20

Led type	SMD LED 2835 323 pcs x 0,15W	
Power	49W	
Input	220V-240V, 50/60Hz	
Color temperature	3000K	4000K
Lumen source	5145 lm	5453 lm
Lumen system	3724 lm	3928 lm
CRI	80	
Dimmable (3 step)	☉	

CE IP20