

# Quark

Suspensions for interior equipped with SMD LEDs, structure in satin nickel aluminum and metal or in aluminium and metal electrostatically painted in sand black, diffusers of opal white silicone.





01-2254

# Quark

**Suspensions for interior equipped with SMD LEDs, structure in satin nickel aluminum and metal or in aluminium and metal electrostatically painted in sand black, diffusers of opal white silicone.**

Serie de suspensii pentru interior echipate cu LED-uri SMD, structură din aluminiu și metal nichel mat sau vopsit în câmp electrostatic negru mat, dispersoare din silicon alb opal.

Sospensioni per interni equipaggiate con SMD LED, struttura in alluminio e metallo nichel opaco o alluminio e metallo verniciato a polveri nero opaco, diffusori in silicone opalino bianco.

Люстры для интерьера оснащенные светодиодами SMD, структура из алюминия и металла покрытых матовым никелем или окрашенных в черный матовый цвет, рассеиватели из опалового силикона белого цвета.


Beltéri függesztékek, SMD LED-el szerelve, matt króm alumínium és fém szerkezet vagy elektrosztatikus mezőben matt feketére festett szerkezet. Opál szilikon diszperzór.

Серия окачвания за интериор, разполагат със SMD светодиоди, алуминиева и матова никелова метална структура или боядисана в електростатично черно поле, дифузери от опалов бял силикон.

Závesné svietidlá do interiúru vybavené LED diódami SMD, štruktúra zo saténového niklu a kovu alebo z hliníka a kovu elektrostaticky natieraná matnou čiernou, difútory opalového bieleho silikónu.




art. **01-2251 Satin Nickel**  
art. **01-2252 Sand Black**

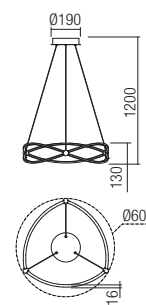

Led type	SMD LED 2835 396 pcs x 0,11W
Power	43W
Input	220-240V, 50/60Hz
Color temperature	3000K
Lumen source	5100 lm
Lumen system	3397 lm
Optic	-
CRI	80
Dimmable (3 step)	☾



CE IP20

## Technical info

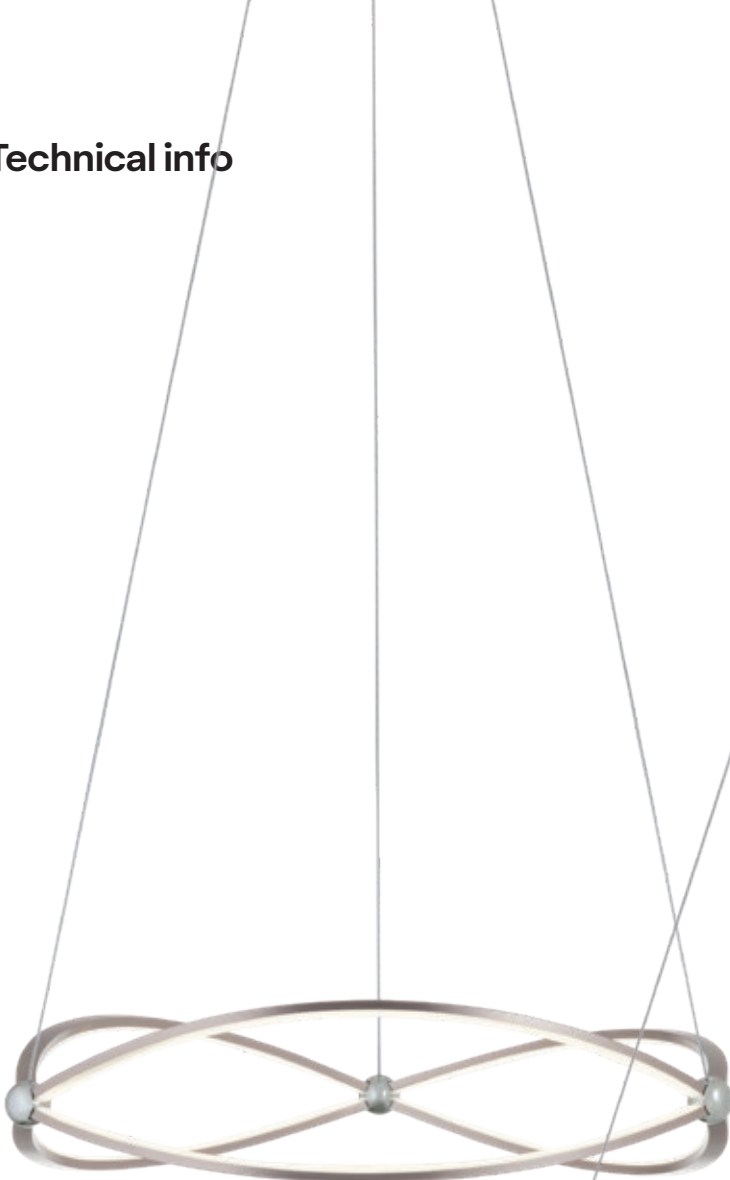

01-2251

art. 01-2253 Satin Nickel  
art. 01-2254 Sand Black

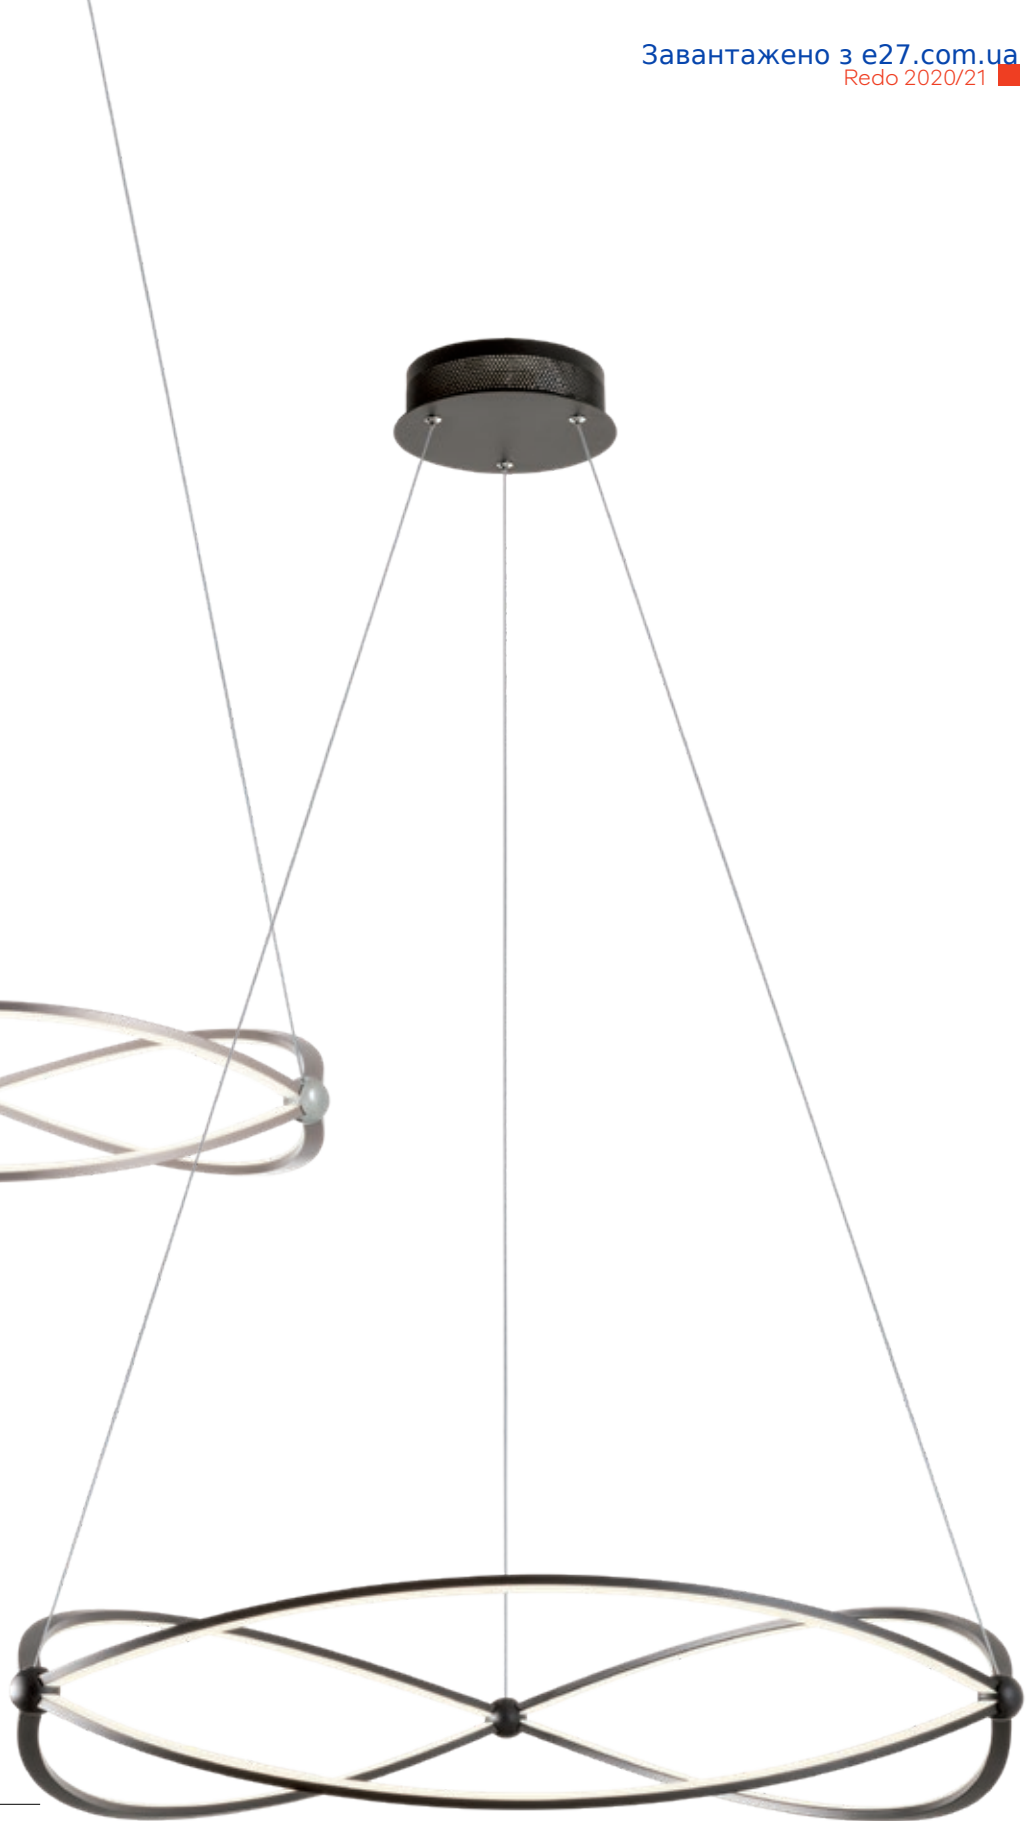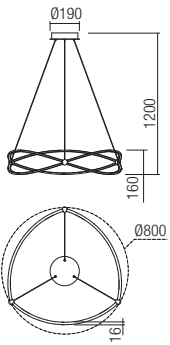

01-2254

Led type	SMD LED 2835 540 pcs x 0,10W
Power	54W
Input	220-240V, 50/60Hz
Color temperature	3000K
Lumen source	6264 lm
Lumen system	4212 lm
Optic	-
CRI	80
Dimmable (3 step)	☾

CE IP20