



OCTANIS series

60

75

90



RSL74091-2.5/7W

RSL74091-3/12W

RSL74091-4/18W



	CCT	CRI	P	Flux	Material	Size
RSL74091-2.5/7W	3000K	Ra ≥ 90	7w	383 Lm	AL	D 68 H 51
RSL74091-3/12W	4000K	Ra ≥ 90	12w	675 Lm	AL	D 83 H 58
RSL74091-4/18W	5000K	Ra ≥ 90	18w	950 Lm	AL	D 98 H 58

LED | 220/240V~50Hz | CE | | | IP44 | | RoHS

Material color SB SW

Warranty Period (years): 3 years

Life hours (LH): 30. 000


Power Factor (PF):

RSL74091-2.5/7w ≥0.5

RSL74091-3/12w ≥0.5

RSL74091-4/18w ≥0.9

Risk Group (RG): 0

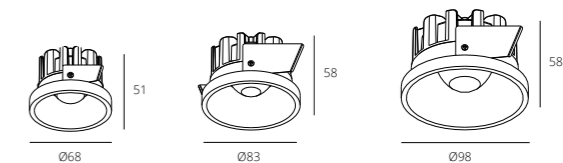

RSL74091-2.5/7W

RSL74091-3/12W

RSL74091-4/18W



ВБУДОВАНИЙ ТОЧКОВИЙ СВІТИЛЬНИК СЕРІЇ OCTANIS

RECESSED SPOTLIGHT