

MEDO 40 CORONA
CW, TRIAC




A-A++ Range A++-E




- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 700mA
Total consumption: 30W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

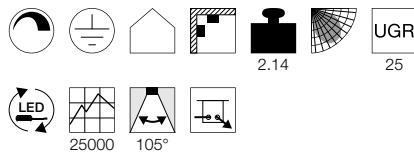

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m
Item no. 135250
- Suspension set 1.5m
Item no. 135251
- Suspension set 1.5m
Item no. 135254
- Suspension set 5m
Item no. 1001950
- Suspension set 5m
Item no. 1001951
- Suspension set 5m
Item no. 1001952

Variant	Item no.
Down: 2750/2900lm 3000/4000K CRI>80 Up: 50lm 3000/4000K CRI>80	
■ black	1001883
Down: 2750/2900lm 3000/4000K CRI>80 Up: 50lm 3000/4000K CRI>80	
□ white	1001884
Down: 2750/2900lm 3000/4000K CRI>80 Up: 50lm 3000/4000K CRI>80	
■ grey	1001885

MEDO 60 CORONA
CW, TRIAC




A-A++ Range A++-E




- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 40W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

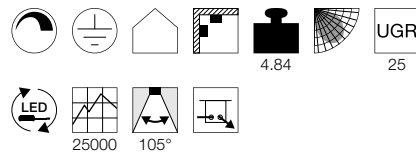

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m
Item no. 135250
- Suspension set 1.5m
Item no. 135251
- Suspension set 1.5m
Item no. 135254
- Suspension set 5m
Item no. 1001950
- Suspension set 5m
Item no. 1001951
- Suspension set 5m
Item no. 1001952

Variant	Item no.
Down: 4350/4750lm 3000/4000K CRI>80 Up: 120lm 3000/4000K CRI>80	
■ black	1001886
Down: 4350/4750lm 3000/4000K CRI>80 Up: 120lm 3000/4000K CRI>80	
□ white	1001887
Down: 4350/4750lm 3000/4000K CRI>80 Up: 120lm 3000/4000K CRI>80	
■ grey	1001888

MEDO 90 CORONA
CL, TRIAC




A-A++ Range A++-E




- With corona effect
- Colour temperature (3000K/4000K) selectable using a switch
- Can be converted into a pendant using the additionally available accessories

Product details

220-240V ~50/60Hz | 1050mA
Total consumption: 78W
Material: Aluminium / Polycarbonate (PC)
Dimmable: Triac C

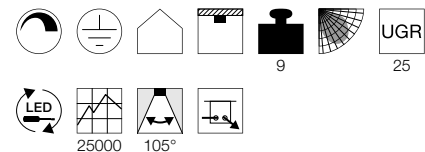

Dimensioned drawing



Note

Suspension set excl.

Recommended accessories

- Suspension set 1.5m
Item no. 135250
- Suspension set 1.5m
Item no. 135251
- Suspension set 1.5m
Item no. 135254
- Suspension set 5m
Item no. 1001950
- Suspension set 5m
Item no. 1001951
- Suspension set 5m
Item no. 1001952

Variant	Item no.
Down: 9500/10100lm 3000/4000K CRI>80 Up: 125lm 3000/4000K CRI>80	
■ black	1001878
Down: 9500/10100lm 3000/4000K CRI>80 Up: 125lm 3000/4000K CRI>80	
□ white	1001879
Down: 9500/10100lm 3000/4000K CRI>80 Up: 125lm 3000/4000K CRI>80	
■ grey	1001880