
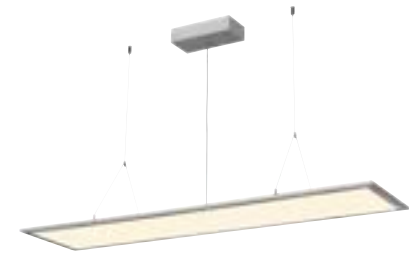



I-PENDANT PRO
 PD, 1195x295mm, 1-10V




- Height adjustable

Product details

100-240V ~50/60Hz | 1000mA
 Total consumption: 42W
 Material: Aluminium / Acrylic
 Dimmable: 1-10V

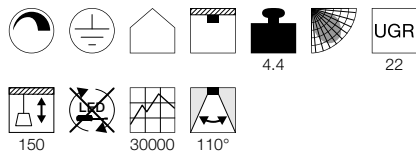

Dimensioned drawing




Recommended accessories

1-10V dimming
 Item no. 470505

Variant	Item no.
3100lm 3000K CRI>80 <input type="checkbox"/> matt white	158723
3550lm 4000K CRI>80 <input type="checkbox"/> matt white	158724
3100lm 3000K CRI>80 <input checked="" type="checkbox"/> grey	158733
3550lm 4000K CRI>80 <input checked="" type="checkbox"/> grey	158734


I-PENDANT PRO
 PD, 1195x295mm,
 UGR<19, 1-10V

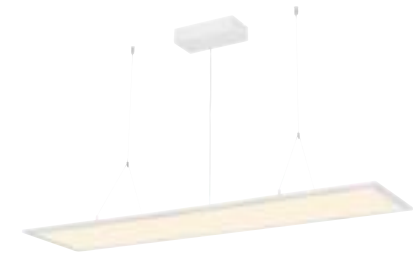


- Height adjustable
- Reduced glare due to UGR <19
- Workstation-compatible

Product details

100-240V ~50/60Hz | 1000mA
 Total consumption: 42W
 Material: Aluminium / Polymethylacrylate (PMMA)
 Dimmable: 1-10V

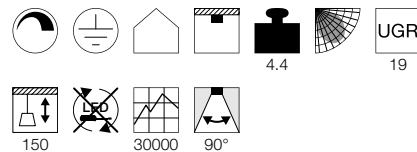

Dimensioned drawing



Recommended accessories

1-10V dimming
 Item no. 470505

Variant	Item no.
3750lm 3000K CRI>80 <input type="checkbox"/> white	1001447
3800lm 4000K CRI>80 <input type="checkbox"/> white	1001448
3750lm 3000K CRI>80 <input checked="" type="checkbox"/> grey	1001647
3800lm 4000K CRI>80 <input checked="" type="checkbox"/> grey	1001648


I-PENDANT PRO
 PD, 1195x295mm, DALI




- Height adjustable
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

100-277V ~50/60Hz | 1000mA
 Total consumption: 42W
 Material: Aluminium / Polymethylacrylate (PMMA)
 Dimmable: Dali

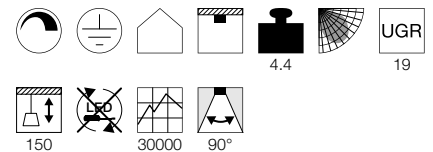

Dimensioned drawing



Variant	Item no.
3750lm 3000K CRI>80 <input type="checkbox"/> white	1003048
3800lm 4000K CRI>80 <input type="checkbox"/> white	1003049
3750lm 3000K CRI>80 <input checked="" type="checkbox"/> grey	1003050
3800lm 4000K CRI>80 <input checked="" type="checkbox"/> grey	1003051