



PANEL 60
CL, round, DALI

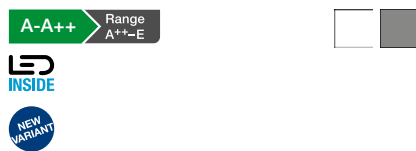


- Panel can be surface mounted or partially recessed

Product details


100-277V ~50/60Hz | 1000mA
Total consumption: 42W
Material: Aluminium / Polymethylacrylate (PMMA)
Installation dimensions:
Installation Ø: 20 cm D: 7 cm
Dimmable: Dali

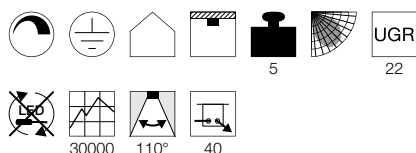

Dimensioned drawing




PANEL
CL, 1200x300mm, TRIAC

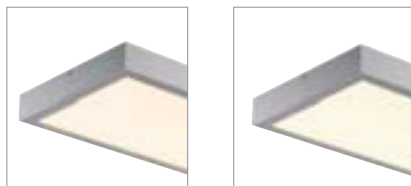


- UGR<19
- Suitable for screen workplaces in accordance with EN 12464-1

Product details


220-240V ~50/60Hz | 1000mA
Total consumption: 45W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Triac C

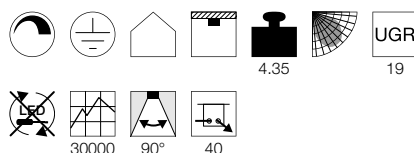

Dimensioned drawing




PANEL
CL, 1200x300mm, DALI

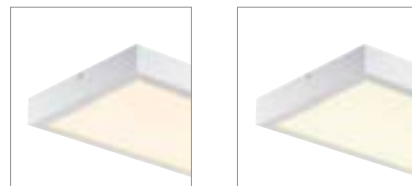


- UGR<19
- Suitable for screen workplaces in accordance with EN 12464-1

Product details

100-277V ~50/60Hz | 1000mA
Total consumption: 45W
Material: Aluminium / Polymethylacrylate (PMMA)
Dimmable: Dali

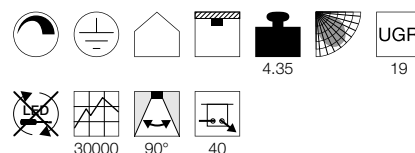

Dimensioned drawing



Variant	Item no.
3150lm 3000K CRI>80	
□ white	1003040
3350lm 4000K CRI>80	
□ white	1003041
3150lm 3000K CRI>80	
■ grey	1003042
3350lm 4000K CRI>80	
■ grey	1003043

Variant	Item no.
3100lm 3000K CRI>80	
□ white	1001505
3400lm 4000K CRI>80	
□ white	1001506
3100lm 3000K CRI>80	
■ grey	1001508
3400lm 4000K CRI>80	
■ grey	1001509

Variant	Item no.
3100lm 3000K CRI>80	
□ white	1003052
3400lm 4000K CRI>80	
□ white	1003053
3100lm 3000K CRI>80	
■ grey	1003054
3400lm 4000K CRI>80	
■ grey	1003055