


NEW TRIA 68
EL, single, round, CS, TRIAC




Product details

220-240V ~50/60Hz | 500mA
Total consumption: 12W
Material: Aluminium
Dimmable: Triac C, Triac L

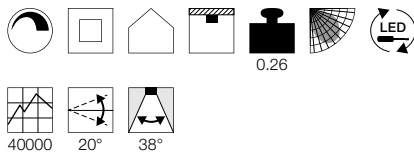

Dimensioned drawing



Note

Clip springs
Material thickness, mounting surface: 20 mm

Variant	Item no.
800lm 2700K CRI>80 ■ matt aluminium	1003067
890lm 3000K CRI>80 ■ matt black	114380
890lm 3000K CRI>80 ■ matt white	114381
890lm 3000K CRI>80 ■ brushed aluminium	114386


NEW TRIA 68
Single, square, CS, TRIAC




• Installation depth <40mm

Product details

220-240V ~50/60Hz | 500mA
Total consumption: 11W
Material: Aluminium
Dimmable: Triac C, Triac L

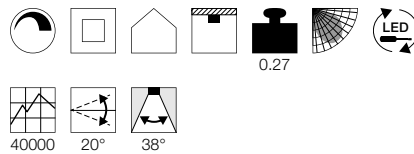

Dimensioned drawing




Note

Clip springs
Material thickness, mounting surface: 20 mm

Variant	Item no.
800lm 2700K CRI>80 ■ matt black	1003068
800lm 2700K CRI>80 ■ matt white	1003069
800lm 2700K CRI>80 ■ matt aluminium	1003070
890lm 3000K CRI>80 ■ matt black	114390
890lm 3000K CRI>80 ■ matt white	114391
890lm 3000K CRI>80 ■ brushed aluminium	114396



114380 490

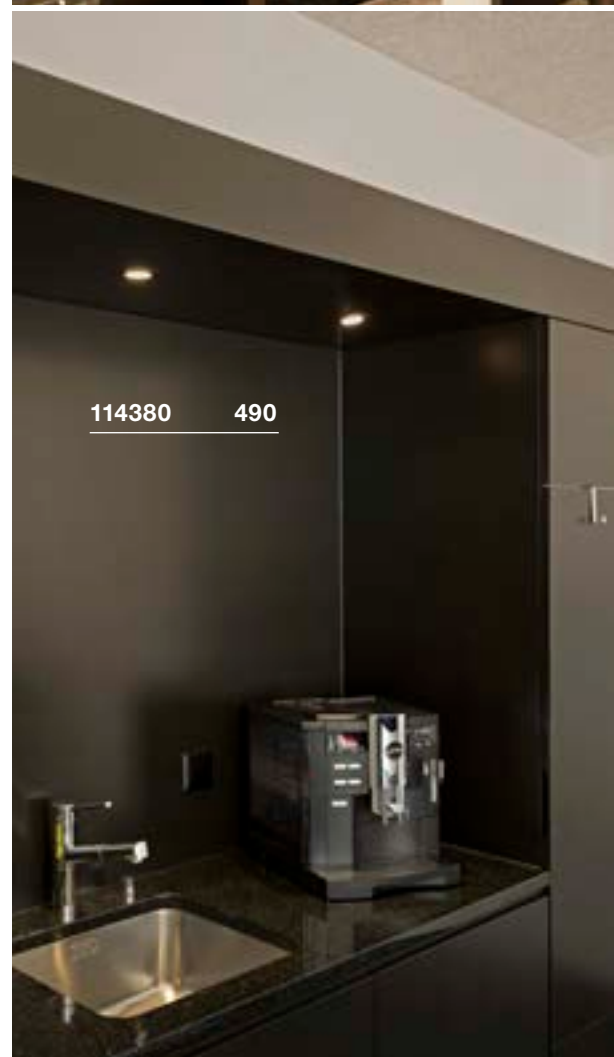

114380 490