


LED PANEL  
600x600mm




- Colour temperature selectable

Product details

700mA | 26W  
Material: Aluminium / Polystyrene (PS)  
Product dimensions: H: 3 cm  
Installation dimensions: D: 5 cm

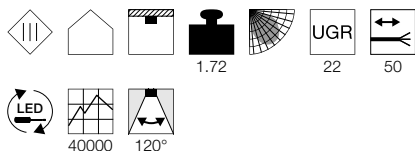

Dimensioned drawing



Note

Open cable end


Recommended accessories

LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief  
Item no. 1002424



Variant	Item no.
2600/2800lm   3000/4000K   CRI>80 <input type="checkbox"/> white	1003071


LED PANEL  
620x620mm

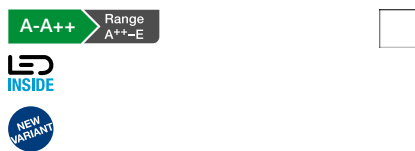


- Colour temperature selectable

Product details

700mA | 26W  
Material: Aluminium / Polystyrene (PS)  
Product dimensions: H: 3 cm  
Installation dimensions: D: 5 cm

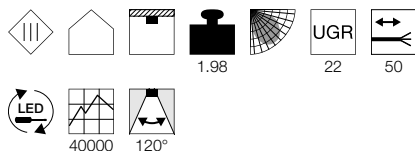

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 40W | 700mA | 1-10V/DALI dimmable, incl. strain relief  
Item no. 1002424



Variant	Item no.
2600/2800lm   3000/4000K   CRI>80 <input type="checkbox"/> white	1003072


LED PANEL  
620x620mm




- Premium LED with CRI>90
- Suitable for screen workplaces in accordance with EN 12464-1
- UGR<19

Product details

1050mA | 35W  
Material: Aluminium / Polystyrene (PS)  
Product dimensions: H: 0,9 cm  
Installation dimensions: D: 5 cm

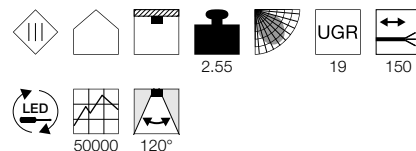

Dimensioned drawing



Note

Open cable end

Recommended accessories

LED driver 1050mA | 40W Triac trailing edge dimmable  
Item no. 464804  
 LED driver 50W | 1050mA | 1-10V/DALI dimmable, incl. strain relief  
Item no. 1002425



Variant	Item no.
4000lm   4000K   CRI>90 <input type="checkbox"/> white	1003074