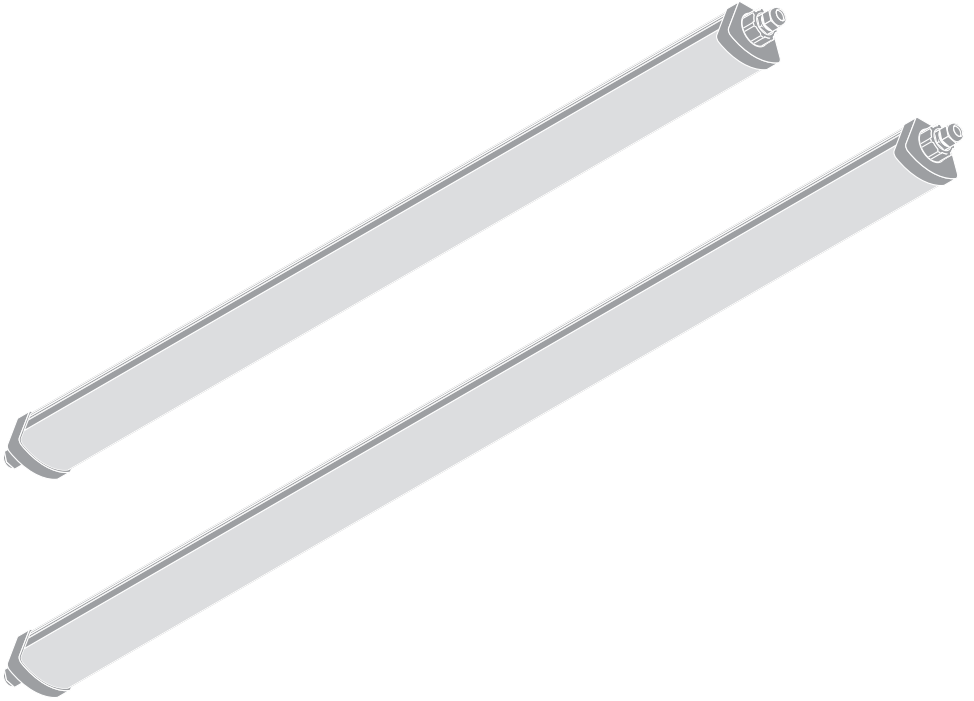






## DAMPPROOF COMPACT







|                                   | EAN           | l x w x h [mm] | W  | lm   | lm/W | K     | IP | IK |
|-----------------------------------|---------------|----------------|----|------|------|-------|----|----|
| DP COMPACT 1200 23W/4000K GR IP65 | 4058075062085 | 1290 x 86 x 68 | 23 | 2800 | 120  | 4000K | 65 | 08 |
| DP COMPACT 1200 44W/4000K GR IP65 | 4058075062108 | 1290 x 86 x 68 | 44 | 5400 | 120  | 4000K | 65 | 08 |
| DP COMPACT 1200 44W/6500K GR IP65 | 4058075062122 | 1290 x 86 x 68 | 44 | 5400 | 120  | 6500K | 65 | 08 |
| DP COMPACT 1500 31W/4000K GR IP65 | 4058075062146 | 1590 x 86 x 68 | 31 | 3800 | 120  | 4000K | 65 | 08 |
| DP COMPACT 1500 55W/4000K GR IP65 | 4058075062160 | 1590 x 86 x 68 | 55 | 6700 | 120  | 4000K | 65 | 08 |
| DP COMPACT 1500 55W/6500K GR IP65 | 4058075062184 | 1590 x 86 x 68 | 55 | 6700 | 120  | 6500K | 65 | 08 |








|                                   | EAN           | V <sub>AC</sub> | Hz       | ∇    | PF    | R <sub>a</sub> | 👤      |
|-----------------------------------|---------------|-----------------|----------|------|-------|----------------|--------|
| DP COMPACT 1200 23W/4000K GR IP65 | 4058075062085 | 220-240V        | 50/60 Hz | 120° | ≥ 0.9 | ≥ 80           | 1.1 kg |
| DP COMPACT 1200 44W/4000K GR IP65 | 4058075062108 | 220-240V        | 50/60 Hz | 120° | ≥ 0.9 | ≥ 80           | 1.2 kg |
| DP COMPACT 1200 44W/6500K GR IP65 | 4058075062122 | 220-240V        | 50/60 Hz | 120° | ≥ 0.9 | ≥ 80           | 1.2 kg |
| DP COMPACT 1500 31W/4000K GR IP65 | 4058075062146 | 220-240V        | 50/60 Hz | 120° | ≥ 0.9 | ≥ 80           | 1.4 kg |
| DP COMPACT 1500 55W/4000K GR IP65 | 4058075062160 | 220-240V        | 50/60 Hz | 120° | ≥ 0.9 | ≥ 80           | 1.4 kg |
| DP COMPACT 1500 55W/6500K GR IP65 | 4058075062184 | 220-240V        | 50/60 Hz | 120° | ≥ 0.9 | ≥ 80           | 1.4 kg |







**DAMPPROOF COMPACT**

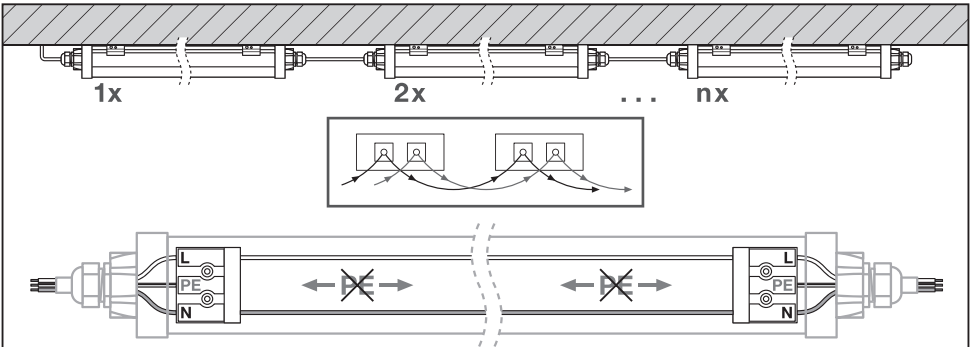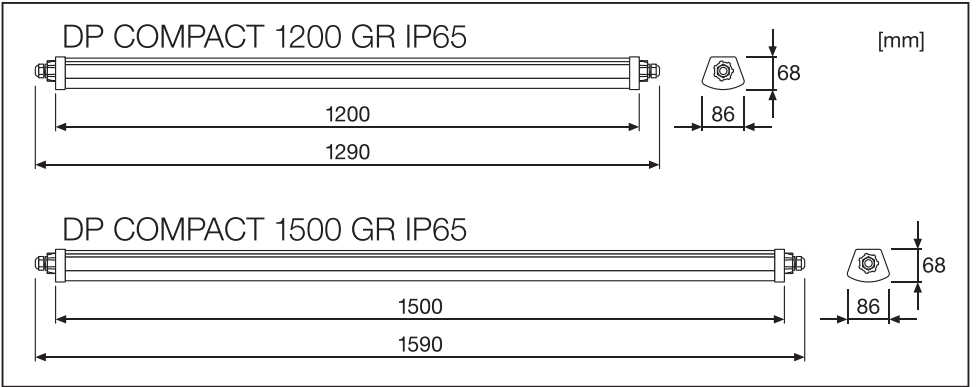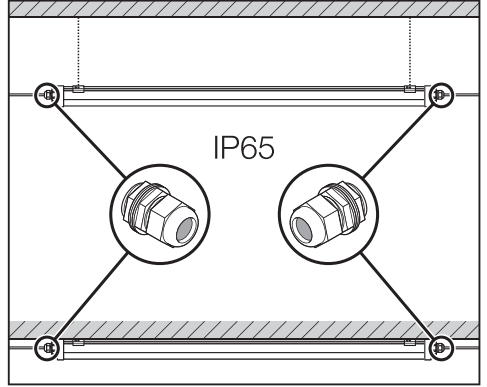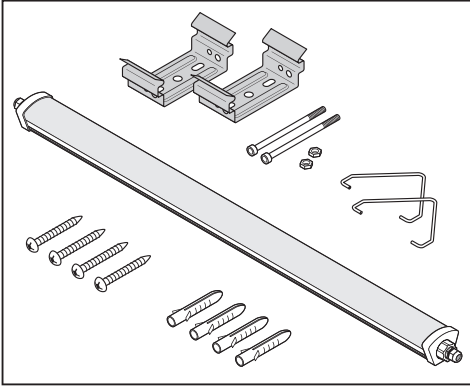

| n                       | B10  | B16  | C10  | C16  |
|-------------------------|---|---|---|---|
| DP COMPACT 1200 GR IP65 | 20  | 20  | 20  | 20  |
| DP COMPACT 1500 GR IP65 | 16  | 16  | 16  | 16  |

**DAMPPROOF COMPACT**

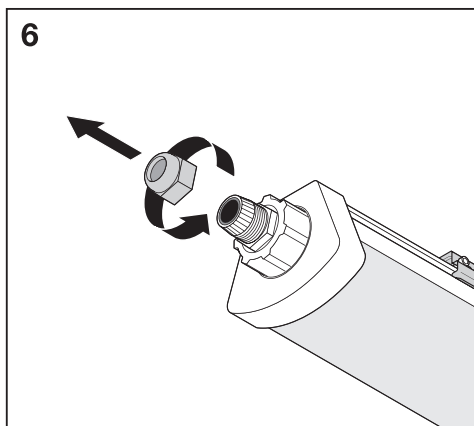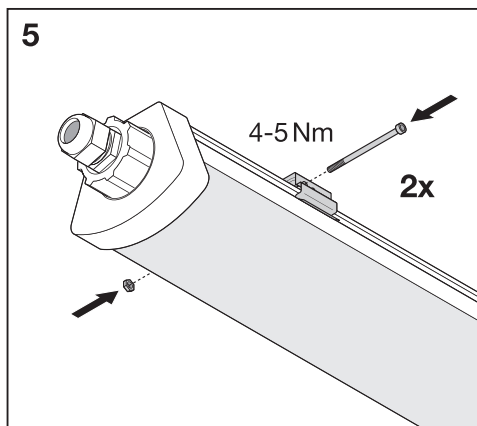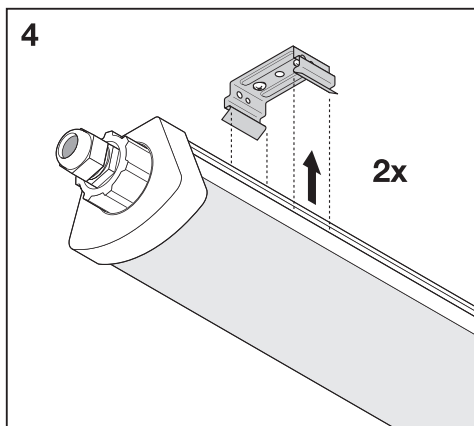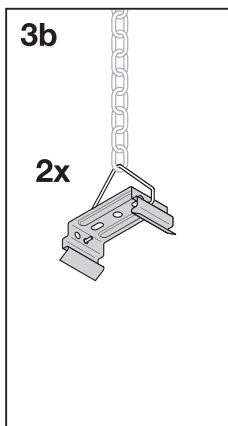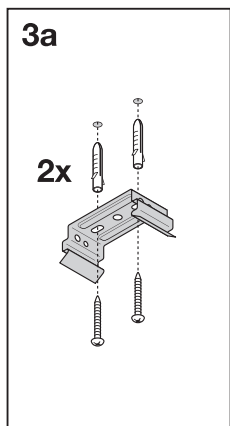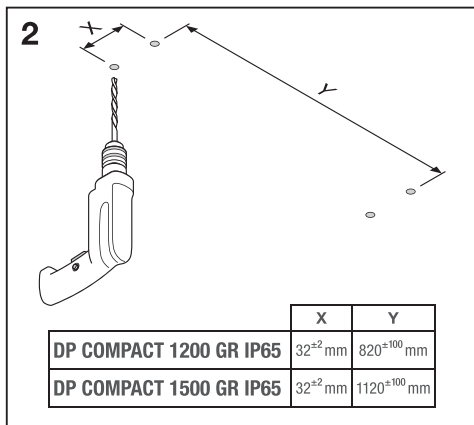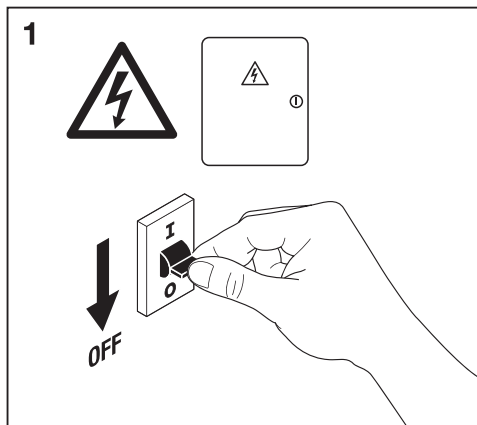

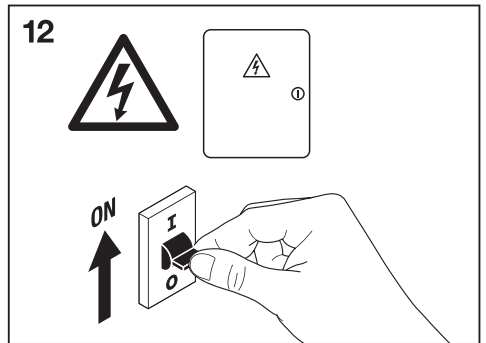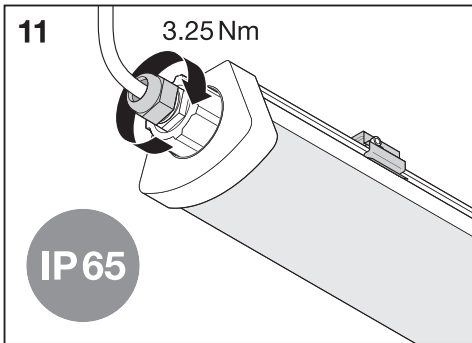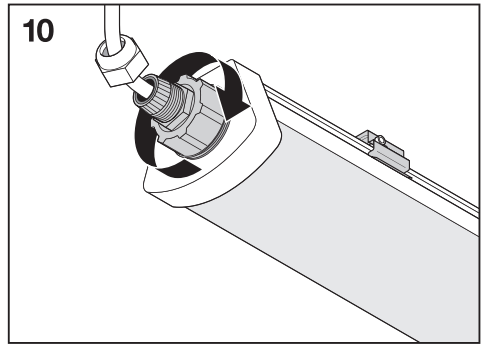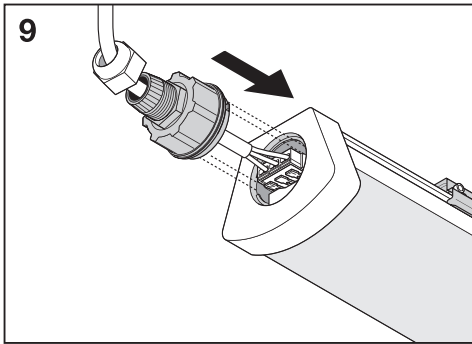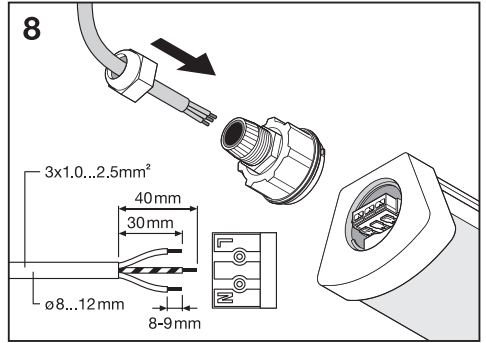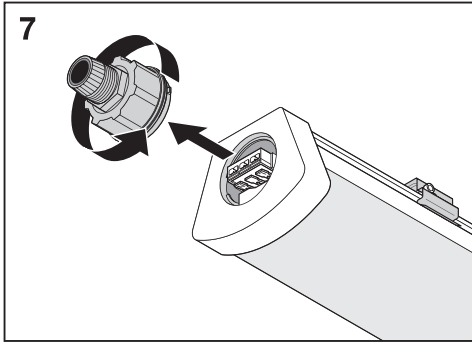

C10449057  
G11031009  
06.03.18



LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg, Germany  
[www.ledvance.com](http://www.ledvance.com)